

HYDRAULIC GEAR
PUMPS AND
MOTORS

POLARIS®

INDEX

Section	Page
INTRODUCTION	3
INSTRUCTIONS.....	4
FEATURES.....	5
GEAR PUMPS PERFORMANCE CURVES	8
GEAR MOTORS PERFORMANCE CURVES	13
SINGLE UNITS DIMENSIONS - SIDE PORTS	18
SINGLE UNITS DIMENSIONS - REAR PORTS	19
MULTIPLE PUMPS	20
MULTIPLE PUMPS DIMENSIONS	24
OUTBOARD BEARING OPTIONS.....	26
VERSION WITH OUTBOARD BEARING	27
DRIVE SHAFTS	31
MOUNTING FLANGES AND TABLE OF COMPATIBILITY.....	34
POR TS POSITION AND TYPE	38
VALVE OPTIONS	43
HOW TO ORDER - SINGLE UNITS.....	44
HOW TO ORDER - POLARIS PHP 20 DOUBLE PUMPS.....	46
HOW TO ORDER - POLARIS PHP 20 DOUBLE PUMPS DIFFERENT GROUPS.....	48

 04/01/2019
 


Modification from former edition.

INTRODUCTION

Replaces: 03/05.2012

DISPLACEMENTS

From 8.26 cm³/rev (0.50 in³/rev)
 To 33,03 cm³/rev (2.01 in³/rev)

PRESSURE

Max. continuous 250 bar (3625 psi)
 Max. intermittent 280 bar (4060 psi)
 Max. peak 300 bar (4350 psi)


SPEED

Max. 3500 min⁻¹

TYPICAL APPLICATIONS

- Building & Construction
- Material Handling
- Agriculture
- Forestry
- Turf care & Mowers
- Fan Drive

04/01/2019

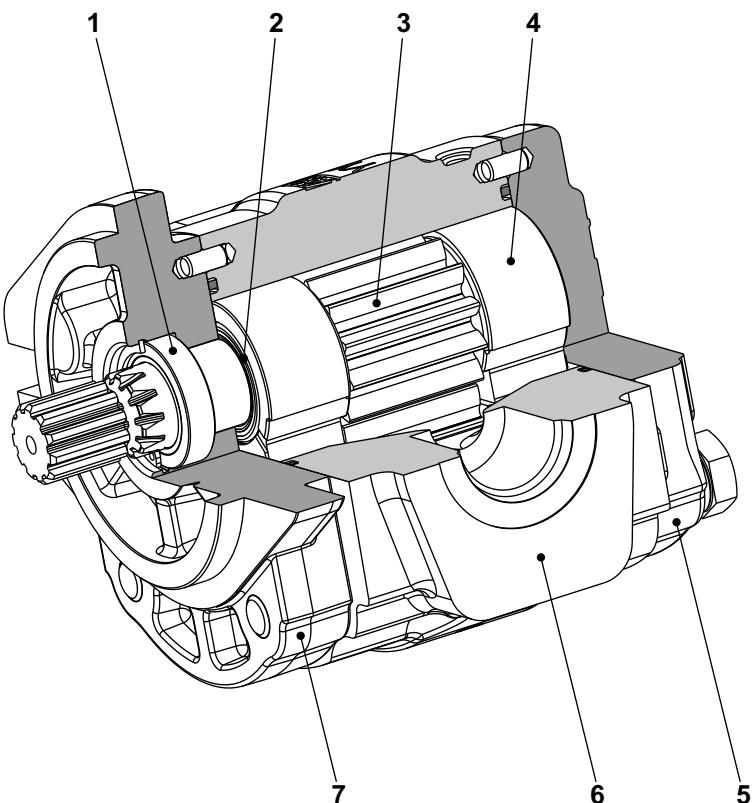

- | | |
|---|-----------------|
| 1 | Pump body |
| 2 | Seal |
| 3 | Gear |
| 4 | Thrust plate |
| 5 | Cover |
| 6 | Body |
| 7 | Mounting flange |

- High working pressure also for high displacements
- Long service life
- Low noise version available
- High volumetric efficiency also at high temperature

- High versatility due to Polaris 20 family components
- Inlet & outlet optimization - High speed
- Combination in multiple pumps
- Built-in valves simplify circuit design

INSTRUCTIONS

INSTALLATION

Pump

The direction of rotation of single-rotation pumps must be the same as that of the drive shaft. Check that the coupling flange correctly aligns the transmission shaft and the pump shaft. Flexible couplings should be used (never rigid fittings) which will not generate an axial or radial load on the pump shaft.

Motor

The direction of rotation of single-rotation motors must match circuit connections. Check that the coupling flange correctly aligns the transmission shaft and the motor shaft. Flexible couplings should be used (never rigid fittings) which will not generate an axial or radial load on the motor shaft.

TANK

Tank capacity must be sufficient for the system's operating conditions (~ 3 times the amount of oil in circulation) to avoid overheating of the fluid. A heat exchanger should be installed if necessary. The intake and return lines in the tank must be spaced apart (by inserting a vertical divider) to prevent the return-line oil from being taken up again immediately.

LINES

The lines must have a major diameter which is at least as large as the diameter of pump or motor ports, and must be perfectly sealed. To reduce loss of power, the lines should be as short as possible, reducing the sources of hydraulic resistance (elbow, throttling, gate valves, etc.) to a minimum. A length of flexible tubing is recommended to reduce the transmission of vibrations. All return lines must end below the minimum oil level, to prevent foaming. Before connecting the lines, remove any plugs and make sure that the lines are perfectly clean.

HYDRAULIC FLUID

Use hydraulic fluid conforming to viscosity data as specified in the first pages of the catalogue. Avoid using mixtures of different oils which could result in decomposition and reduction of the oil's lubricating power.

FILTERS

We recommend filtering the entire system flow. Filters on suction and return line must be fitted in according to the contamination class as indicated in the first pages of the catalogue. Casappa recommends to use its own production filters:



STORAGE

The storage must be in a dry environment. Max storage time in ideal conditions is 24 months. The ideal storage temperature is between 5 °C (41 °F) and 20 °C (68 °F). No problem in case of temperature between -40 °C (-40 °F) and 50 °C (122 °F). Below -40 °C (-40 °F) please consult our pre-sales department.

STARTING UP

Check that all circuit connections are tight and that the entire system is completely clean. Insert the oil in the tank, using a filter. Bleed the circuit to assist in filling. Set the pressure relief valves to the lowest possible setting. Turn on the system for a few moments at minimum speed, then bleed the circuit again and check the level of oil in the tank.

If the difference between pump or motor temperature and fluid temperature exceeds 10 °C (50 °F), rapidly switch the system on and off to heat it up gradually. Then gradually increase the pressure and speed of rotation until the pre-set operating levels as specified in the catalogue are attained.

COLD START



Cold start is meant short term and low idle. During cold start of the machine the following limits can be applied:

Minimum inlet pressure	0,5 bar abs. (7 psi)
Max drain pressure / Max delivery pressure	+ 50% of standard values
Minimum temperature	-40 °C (-40 °F)
Max oil viscosity	2000 mm ² /s (cSt) [9100 SSU]

If the ambient temperature is lower than -20 °C (-4 °F) the system speed and pressure must be limited until the hydraulic oil temperature exceeds -20 °C (-4 °F).

PERIODICAL CHECKS - MAINTENANCE

Keep the outside surface clean especially in the area of the drive shaft seal. In fact, abrasive powder can accelerate wear on the seal and cause leakage. Replace filters regularly to keep the fluid clean. The oil level must be checked and oil replaced periodically depending on the system's operating conditions.

Replaces: 01/06/2009

04/01/2019

FEATURES

Replaces: 03/05.2012

Construction	Heavy duty external gear pumps and motors 3-piece construction
Mounting	EUROPEAN - SAE - GERMAN standard flanges
Ports	Threaded or split flange
Direction of rotation (looking on drive shaft)	Anti-clockwise (S) - clockwise (D) - reversible external drain (R - L) reversible internal drain (B)
Inlet pressure range for pumps	0,7 ÷ 3 bar abs. (10 ÷ 44 psi) If $p > 1,5$ bar abs. (22 psi) specific shaft sealing have to be applied. Please consult our pre-sales department.
Max back pressure for single rotation motors	5 bar (73 psi) continuous @ min. speed 350 min^{-1} 1 bar (14.5 psi) continuous @ max. speed (see page 7)
Max drain line pressure on reversible rotation motors	5 bar (73 psi) continuous @ min. speed 350 min^{-1} 1 bar (14.5 psi) continuous @ max. speed (see page 7)
Max back pressure on in series motors	150 bar (2175 psi)
Fluid temperature range	See table (1)
Fluid	Mineral oil based hydraulic fluids to ISO/DIN. For other fluids please consult our pre-sales department
Viscosity range	From 12 to 100 mm^2/s (cSt) [60 to 456 SSU] recommended Up to 750 mm^2/s (cSt) [3410 SSU] permitted
Filtering requirement and recommended fluid contamination	See table (2) page 6



Tab. 1 

Type	Fluid composition	Max pressure bar (psi)	Max speed min^{-1}	Temperature - °C (°F)			Seals (●)	Shaft seals option (◆)
				Min	Max continuous	Max peak		
ISO/DIN	Mineral oil based hydraulic fluid to ISO/DIN	See page 7	See page 7	-25 (-13)	80 (176)	100 (212)	N	D C1
				-25 (-13)	110 (230)	125 (257)	V	
				-25 (-13)	110 (230)	125 (257)	T-PV	

(●) N = Buna NBR (standard) - V = Viton-FKM - T-PV = Hydrogenated buna HNBR seals with Viton-FKM shaft seals

04/01/2019

**D (◆)** shaft seals with wiper seal**C1 (◆)** High pressure special shaft seal

Single rotation pumps	Max drain line pressure: 0,5 bar (7 psi)	
Single rotation motors Reversible rotation pumps and motors	Max drain line pressure: 5 bar (73 psi) @ 350 min^{-1}	

FEATURES

Filtration

Tab. 2


Working pressure bar (psi)	$\Delta p < 140$ $\Delta p < (2030)$	$140 < \Delta p < 210$ $(2030) < \Delta p < (3045)$	$\Delta p > 210$ $\Delta p > (3045)$
Contamination class NAS 1638	10	9	8
Contamination class ISO 4406	21/19/16	20/18/15	19/17/14
Achieved with filter β_{10} (c) ≥ 200 ISO 16889	-	10 μm	10 μm
Achieved with filter β_{25} (c) ≥ 200 ISO 16889	25 μm	-	-

Casappa recommends to use its own production filters:




Replaces: 03/05/2012

Definition of rotation direction looking on the drive shaft

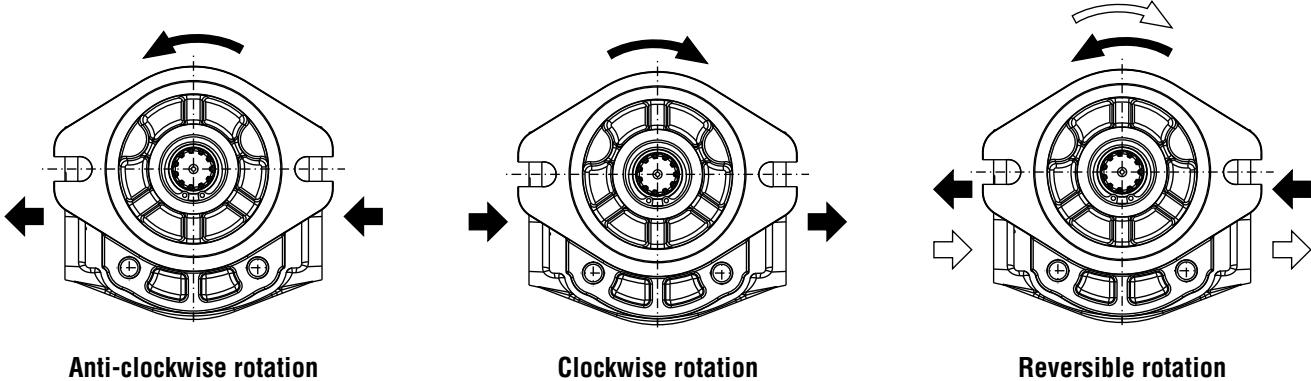
Anti-clockwise rotation
Clockwise rotation
Reversible rotation

Pressure definition

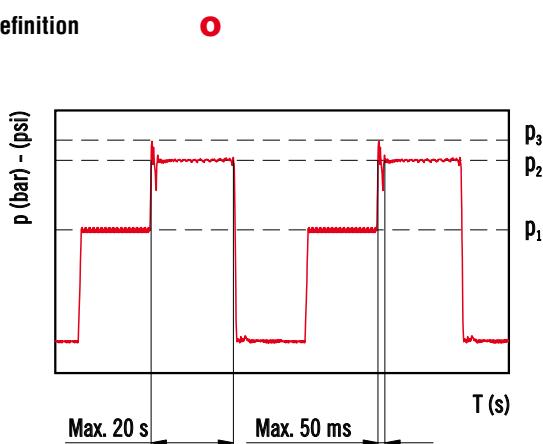

p_1 Constant operating pressure
 p_2 System pressure (relief valve setting)
 p_3 Peak of pressure

The peak of pressure is the max pressure allowed and it corresponds to the overshoot of the relief valve.

Please note that both relief valve setting and overshoot must be lower than their limits.

If the relief setting is compliant but the overshoot is higher than the limit, the relief setting must be decreased until the overshoot is compliant to Casappa limit.

For high frequency applications please consult our pre-sales department.

04/01/2019

FEATURES

Replaces: 03/05.2012

Pump type PHP Motor type PHM	Displacement cm³/rev (in³/rev)	Max. pressure			Max. speed min⁻¹	Min. speed
		p ₁	p ₂	p ₃		
		bar (psi)	bar (psi)	bar (psi)		
PH. 20•8 ○	8,26 (0.50)	250 (3600)	280 (4060)	300 (4350)	3500	500
PH. 20•10,5 ○	10,9 (0.66)	250 (3600)	280 (4060)	300 (4350)	3500	500
PH. 20•11,2 ○	11,23 (0.69)	250 (3600)	280 (4060)	300 (4350)	3500	500
PH. 20•14 ○	14,53 (0.89)	250 (3600)	280 (4060)	300 (4350)	3500	500
PH. 20•16 ○	16,85 (16.85)	250 (3600)	280 (4060)	300 (4350)	3500	500
PH. 20•18 ○	1,12 (18.29)	250 (3600)	280 (4060)	300 (4350)	3500	500
PH. 20•19	19,09 (1.16)	250 (3600)	280 (4060)	300 (4350)	3500	500
PH. 20•20	21,14 (1.29)	250 (3600)	280 (4060)	300 (4350)	3500	500
PH. 20•23	23,32 (1.42)	250 (3600)	280 (4060)	300 (4350)	3000	500
PH. 20•24,5	24,84 (1.52)	230 (3335)	260 (3770)	280 (4060)	3000	500
PH. 20•25	26,42 (1.61)	230 (3335)	260 (3770)	280 (4060)	3000	500
PH. 20•27,8	28,21 (1.72)	200 (2900)	230 (3335)	250 (3625)	2500	500
PH. 20•31,5	33,03 (2.01)	200 (2900)	230 (3335)	250 (3625)	2500	500

Pressure values in the table refer to side ports unidirectional pumps and motors.

For reversible pumps and motors, max pressures are 250 bar (3600 psi) excepted those with lower pressure values.

For different configurations and working conditions please consult our pre-sales department.

Q	l/min (US gpm)	Flow
M	Nm (lbf in)	Torque
P	kW (HP)	Power
V	cm³/rev (in³/rev)	Displacement
n	min⁻¹	Speed
Δp	bar (psi)	Pressure

Efficiencies

		Pumps	Motors
$\eta_v = \eta_v (V, \Delta p, n)$	Volumetric efficiency	(≈ 0,97)	(≈ 0,96)
$\eta_{hm} = \eta_{hm} (V, \Delta p, n)$	Hydro-mechanical efficiency	(≈ 0,88)	(≈ 0,85)
$\eta_t = \eta_v \cdot \eta_{hm}$	Overall efficiency	(≈ 0,85)	(≈ 0,82)

DESIGN CALCULATIONS FOR PUMP

$$Q = Q_{\text{theor.}} \cdot \eta_v \quad [\text{l/min}]$$

$$Q_{\text{theor.}} = \frac{V \cdot n}{1000} \quad [\text{l/min}]$$

$$M = \frac{M_{\text{theor.}}}{\eta_{hm}} \quad [\text{Nm}]$$

$$M_{\text{theor.}} = \frac{\Delta p \cdot V}{62,83} \quad [\text{Nm}]$$

$$P_{\text{IN}} = \frac{P_{\text{OUT}}}{\eta_t} \quad [\text{kW}]$$

$$P_{\text{OUT}} = \frac{\Delta p \cdot Q}{600} \quad [\text{kW}]$$

DESIGN CALCULATIONS FOR MOTOR

$$Q = \frac{Q_{\text{theor.}}}{\eta_v} \quad [\text{l/min}]$$

$$Q_{\text{theor.}} = \frac{V \cdot n}{1000} \quad [\text{l/min}]$$

$$M = M_{\text{theor.}} \cdot \eta_{hm} \quad [\text{Nm}]$$



$$M_{\text{theor.}} = \frac{\Delta p \cdot V}{62,83} \quad [\text{Nm}]$$

$$P_{\text{IN}} = \frac{\Delta p \cdot Q}{600} \quad [\text{kW}]$$

$$P_{\text{OUT}} = P_{\text{IN}} \cdot \eta_t \quad [\text{kW}]$$

04/01/2019

GEAR PUMPS PERFORMANCE CURVES

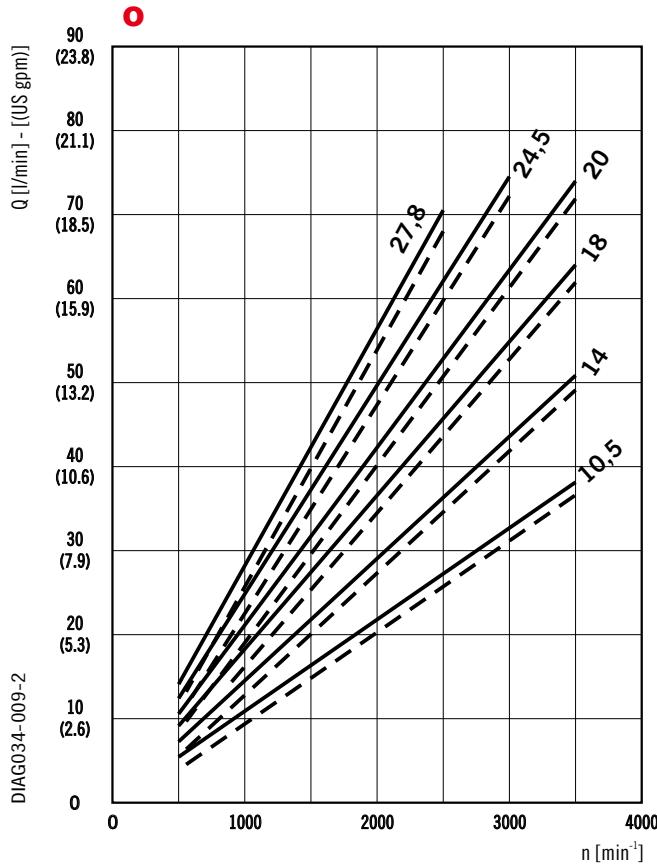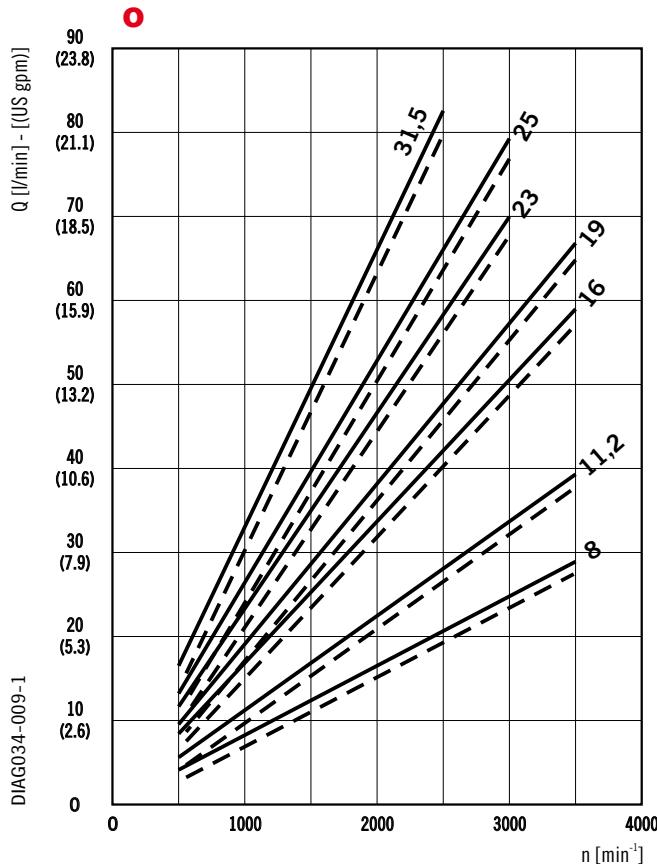





Each curve has been obtained at 50°C (122 °F), using oil with viscosity 46 cSt (210 SSU) at 40°C (104 °F) and at these pressures.

● PH. 20•8	— 20 bar (290 psi)
	- - - 250 bar (3625 psi)
● PH. 20•11,2	— 20 bar (290 psi)
	- - - 250 bar (3625 psi)
● PH. 20•16	— 20 bar (290 psi)
	- - - 250 bar (3625 psi)
PH. 20•19	— 20 bar (290 psi)
	- - - 250 bar (3625 psi)
PH. 20•23	— 20 bar (290 psi)
	- - - 250 bar (3625 psi)
PH. 20•25	— 20 bar (290 psi)
	- - - 230 bar (3335 psi)
PH. 20•31,5	— 20 bar (290 psi)
	- - - 200 bar (2900 psi)





Replaces: 03/05.2012

04/01/2019

GEAR PUMPS PERFORMANCE CURVES

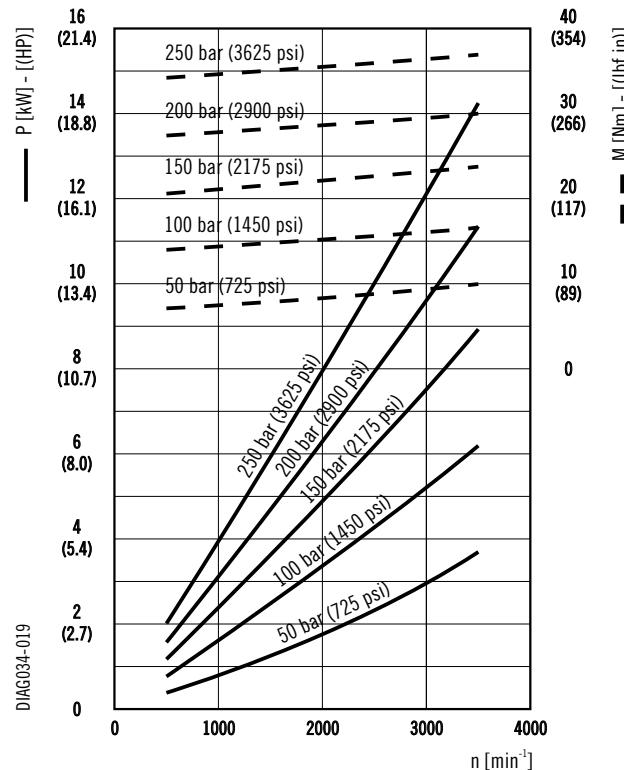
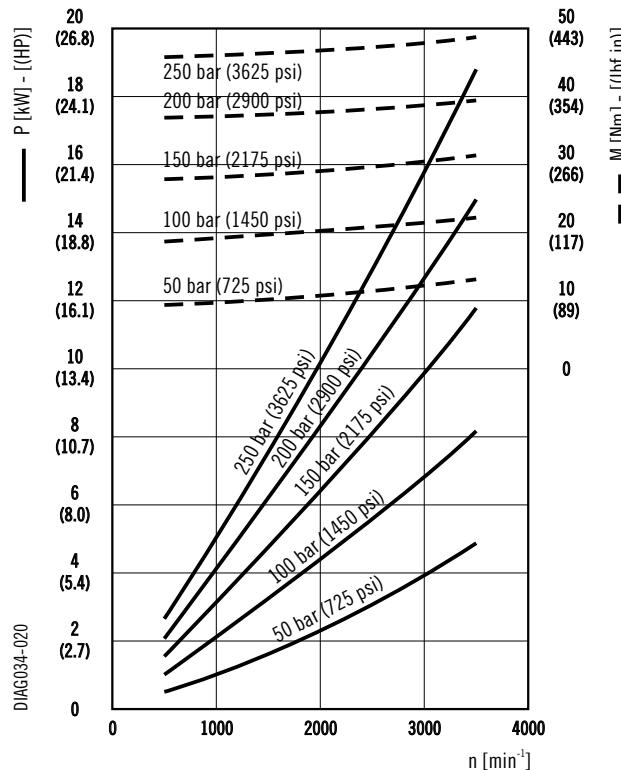
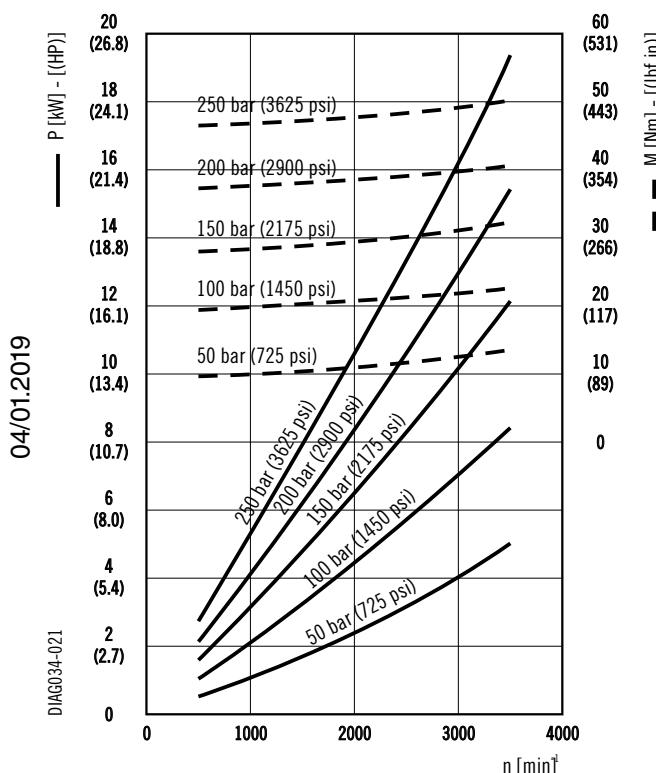
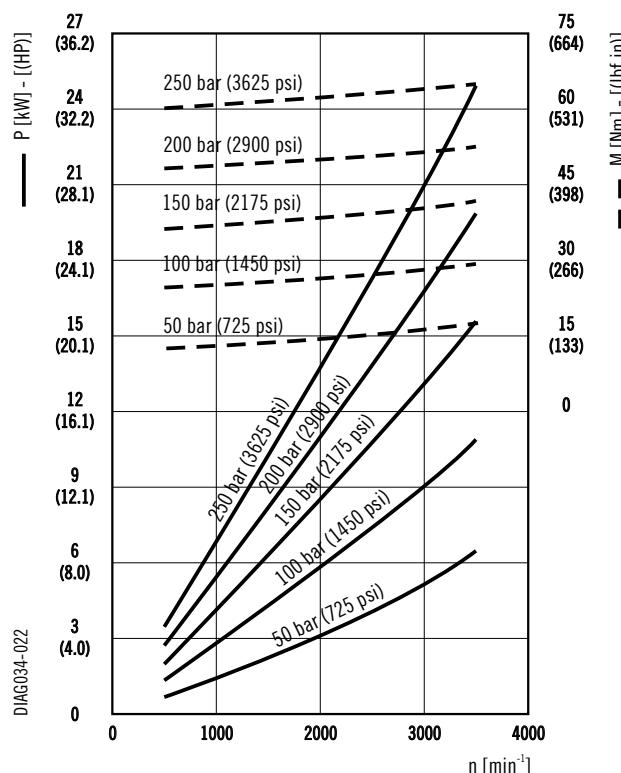
PHP 20•8**PHP 20•10,5****PHP 20•11,2****PHP 20•14**

GEAR PUMPS PERFORMANCE CURVES

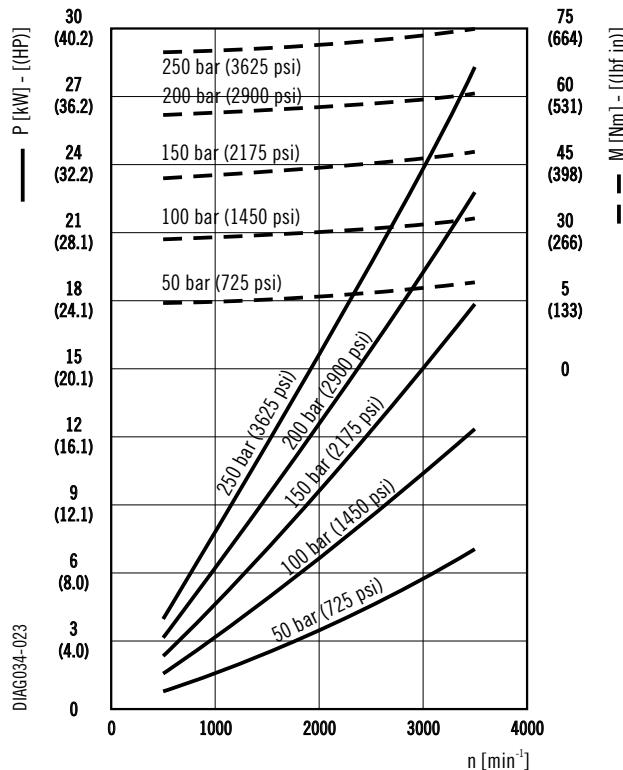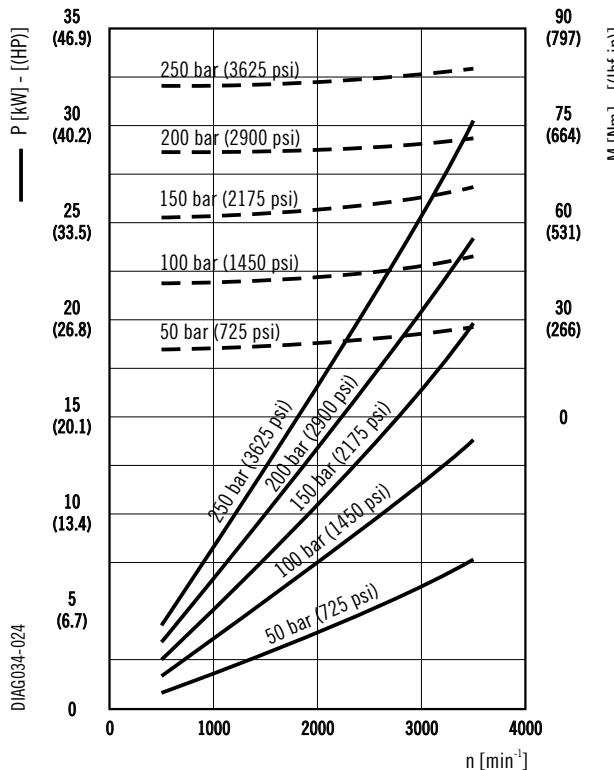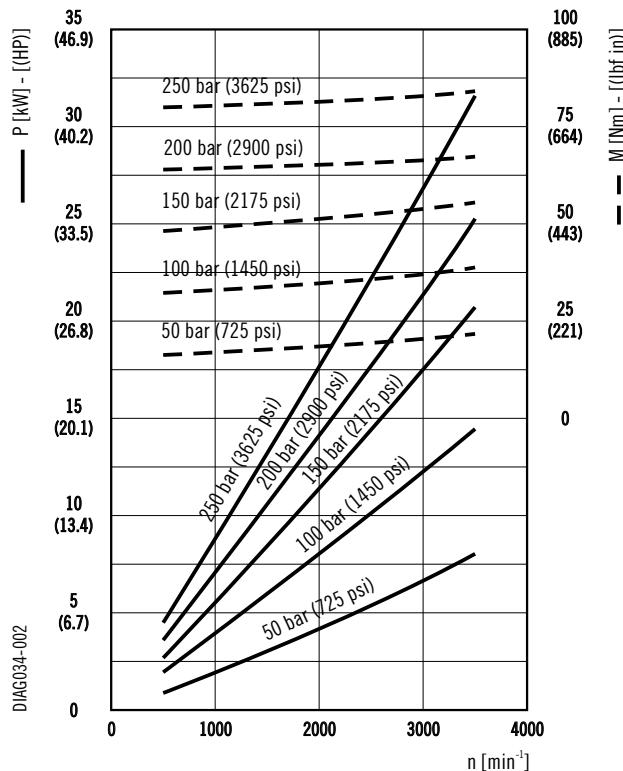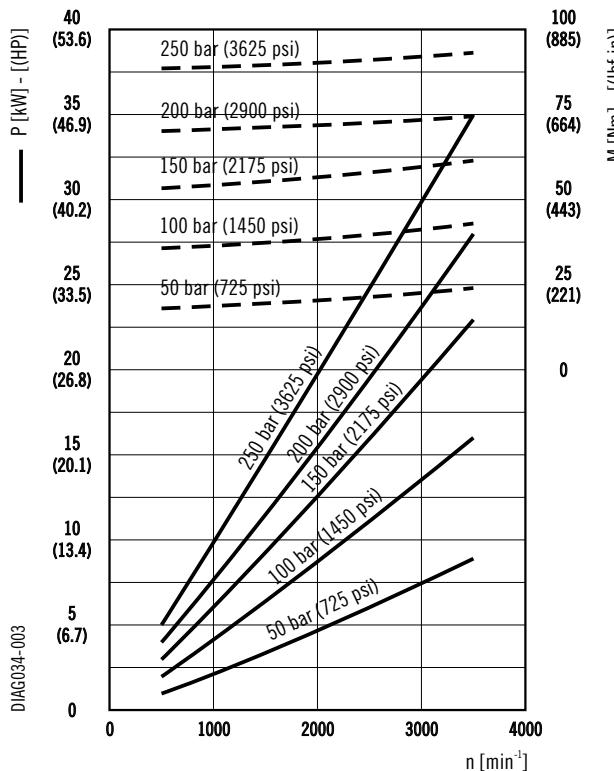PHP 20•16**PHP 20•18****PHP 20•19****PHP 20•20**


04/01/2019

GEAR PUMPS PERFORMANCE CURVES

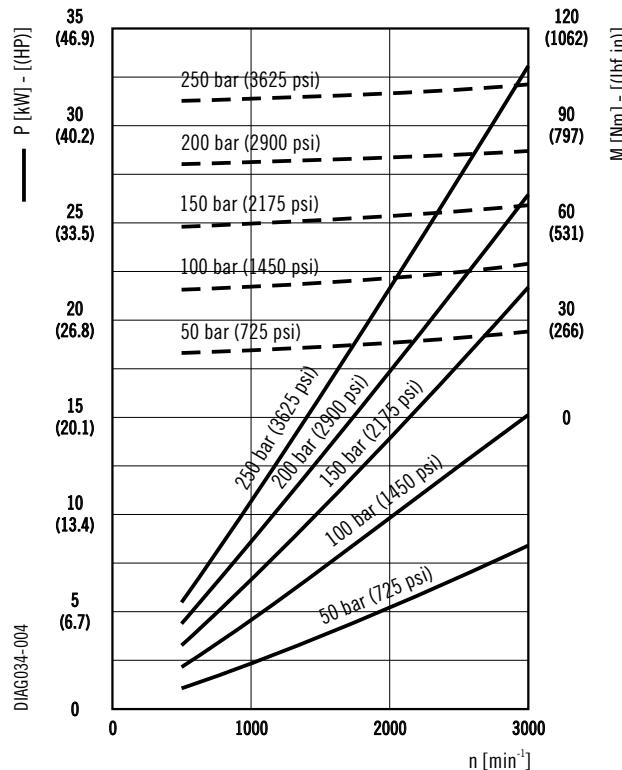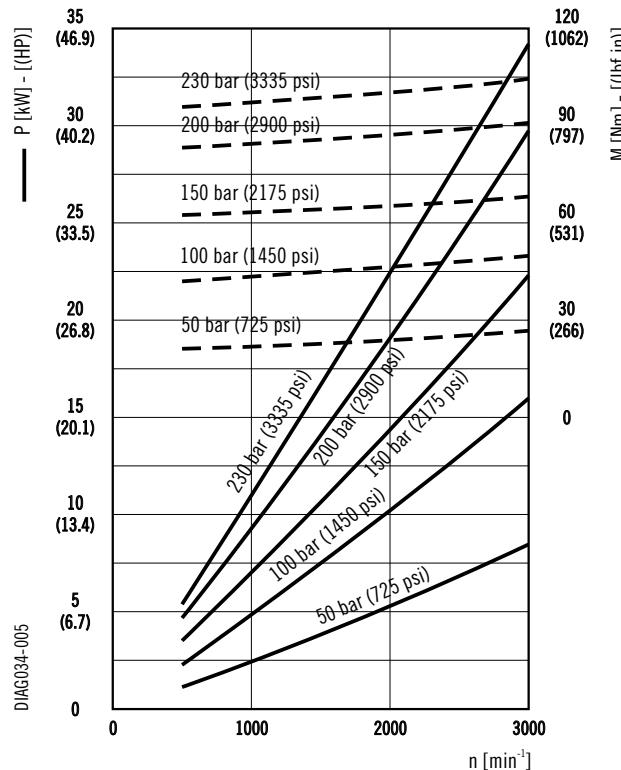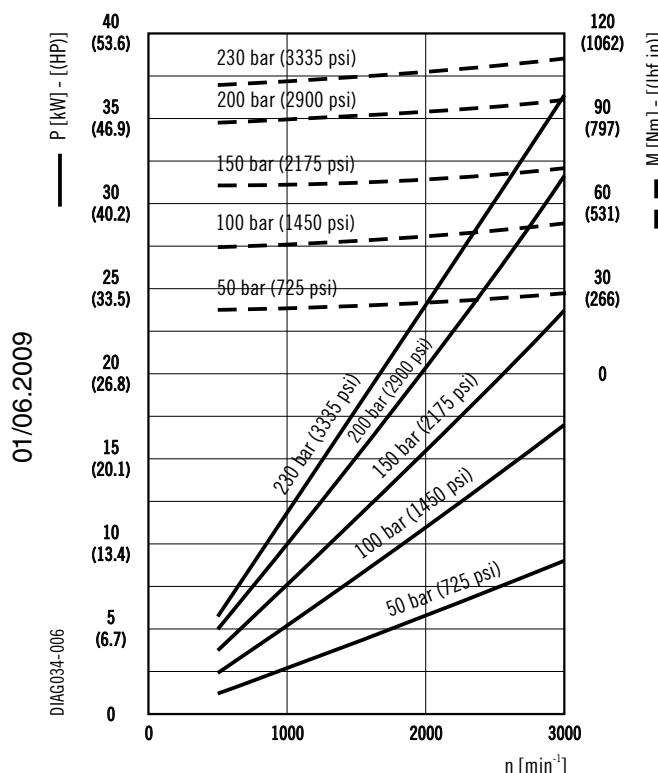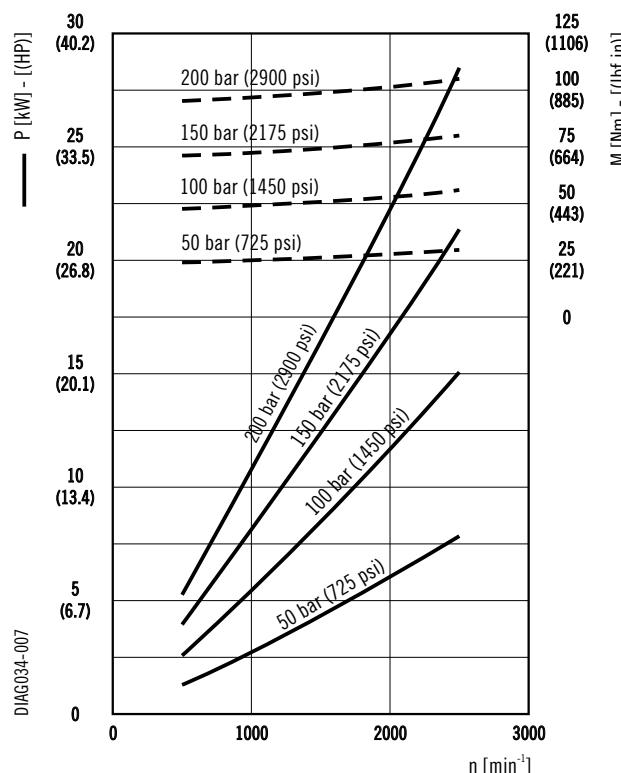PHP 20•23**PHP 20•24,5****PHP 20•25****PHP 20•27,8**

GEAR PUMPS PERFORMANCE CURVES

PHP 20•31,5

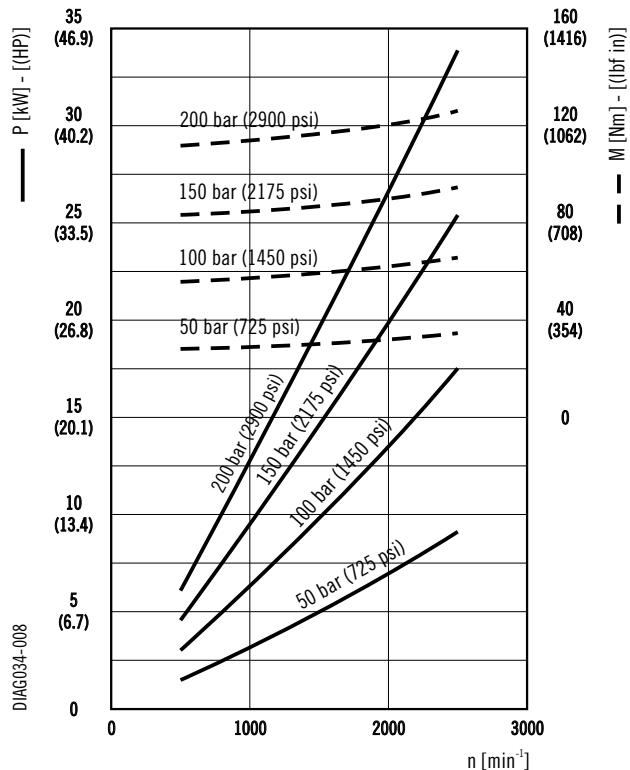


[DAG034-008]

01/06/2009

GEAR MOTORS PERFORMANCE CURVES


Replaces: 03/05.2012

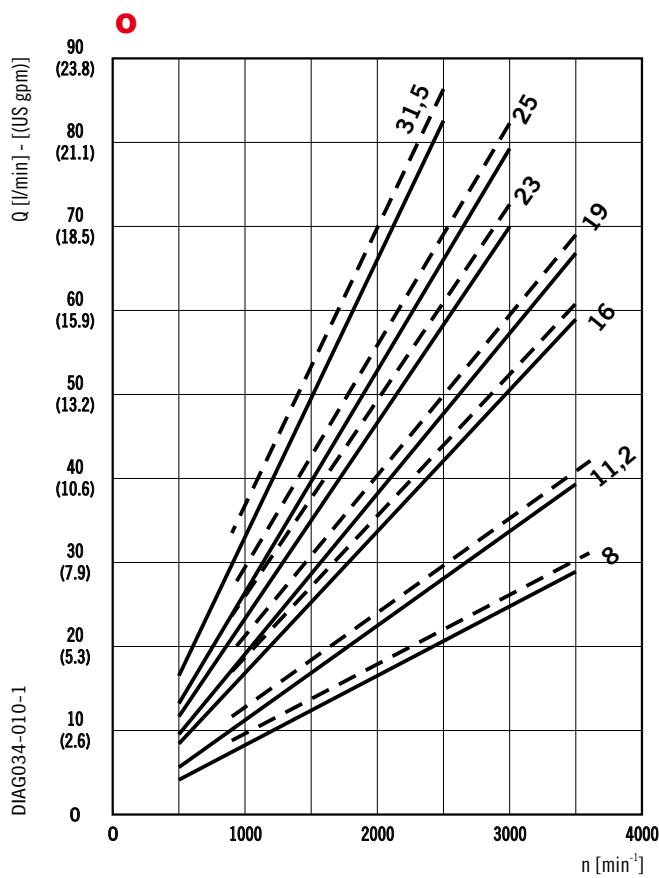

Each curve has been obtained at 50°C (122 °F), using oil with viscosity 46 cSt (210 SSU) at 40°C (104 °F) and at these pressures.





PHM. 20•8	— 20 bar (290 psi)
	- - - 250 bar (3625 psi)
PHM. 20•11,2	— 20 bar (290 psi)
	- - - 250 bar (3625 psi)
PHM. 20•16	— 20 bar (290 psi)
	- - - 250 bar (3625 psi)
PHM. 20•19	— 20 bar (290 psi)
	- - - 250 bar (3625 psi)
PHM. 20•23	— 20 bar (290 psi)
	- - - 250 bar (3625 psi)
PHM. 20•25	— 20 bar (290 psi)
	- - - 230 bar (3335 psi)
PHM. 20•31,5	— 20 bar (290 psi)
	- - - 200 bar (2900 psi)

04/01.2019

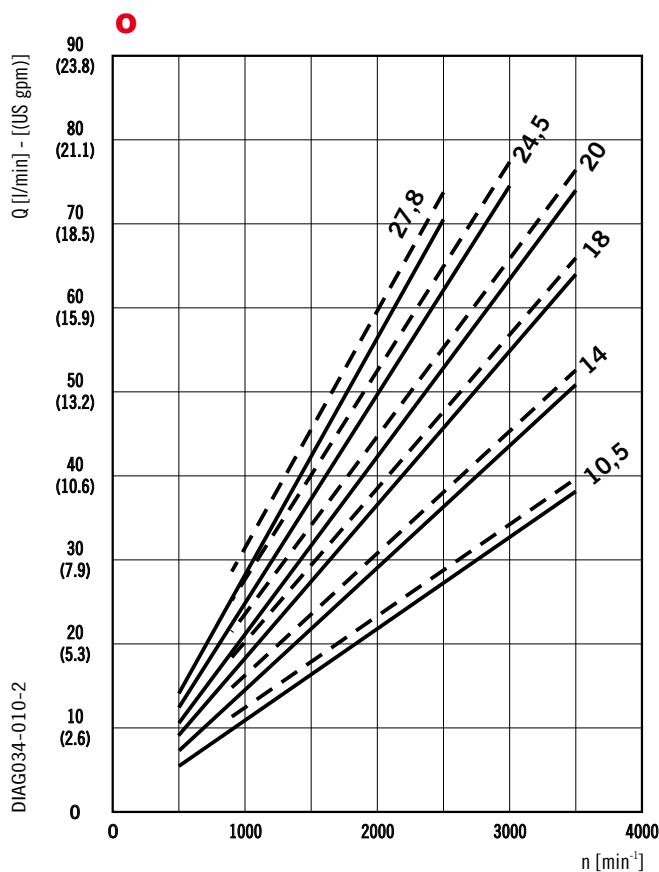





PHM. 20•10,5	— 20 bar (290 psi)
	- - - 250 bar (3625 psi)
PHM. 20•14	— 20 bar (290 psi)
	- - - 250 bar (3625 psi)
PHM. 20•18	— 20 bar (290 psi)
	- - - 250 bar (3625 psi)
PHM. 20•20	— 20 bar (290 psi)
	- - - 250 bar (3625 psi)
PHM. 20•24,5	— 20 bar (290 psi)
	- - - 230 bar (3335 psi)
PHM. 20•27,8	— 20 bar (290 psi)
	- - - 200 bar (2900 psi)

GEAR MOTORS PERFORMANCE CURVES

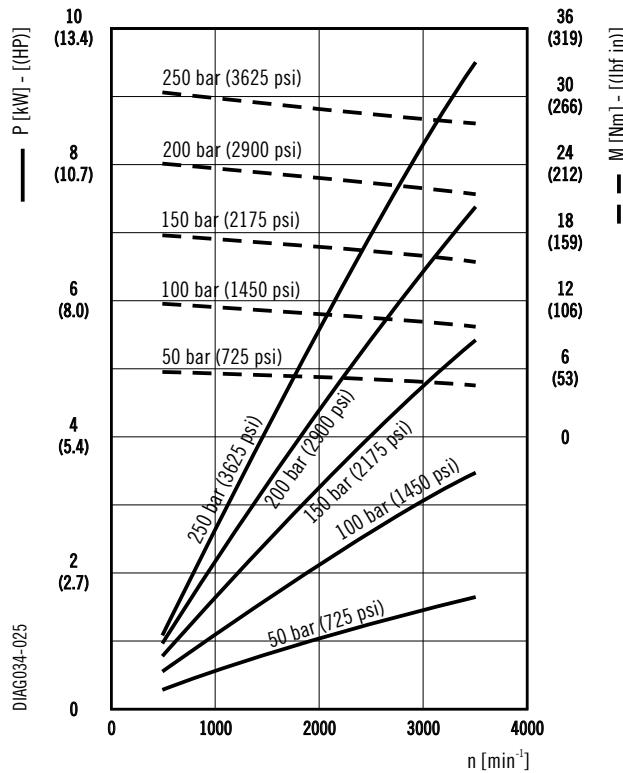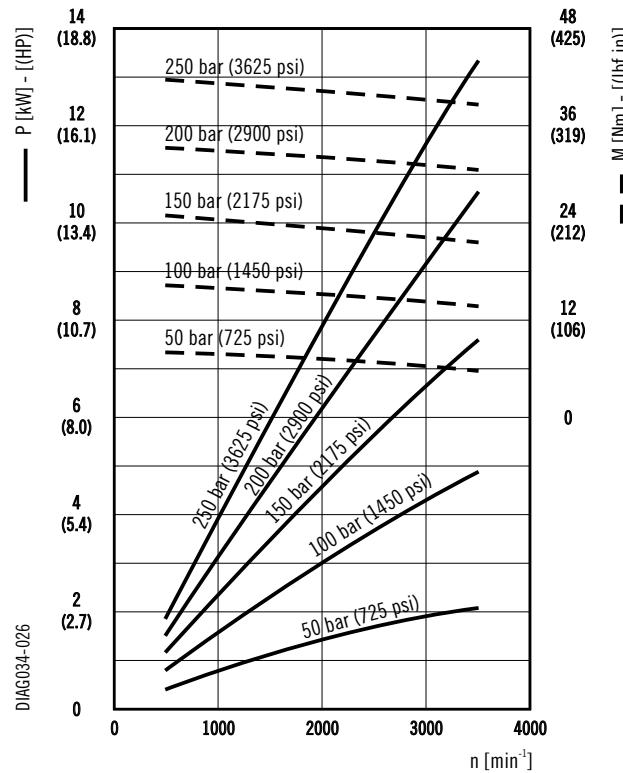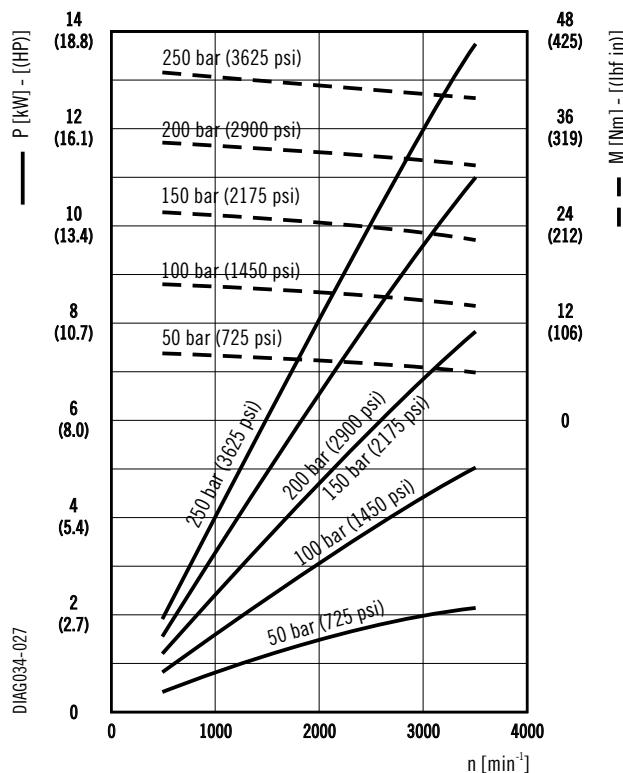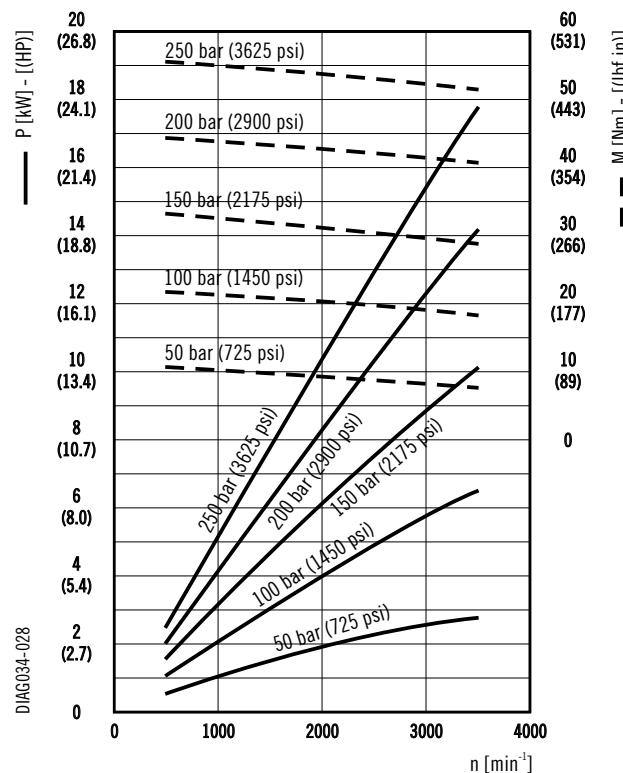PHM 20•8**PHM 20•10,5****PHM 20•11,2****PHM 20•14**

04/01/2019





GEAR MOTORS PERFORMANCE CURVES

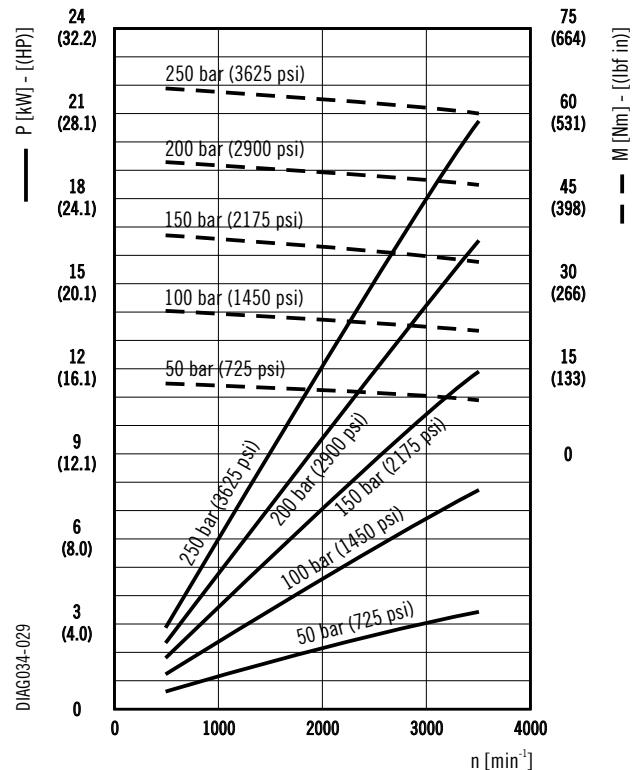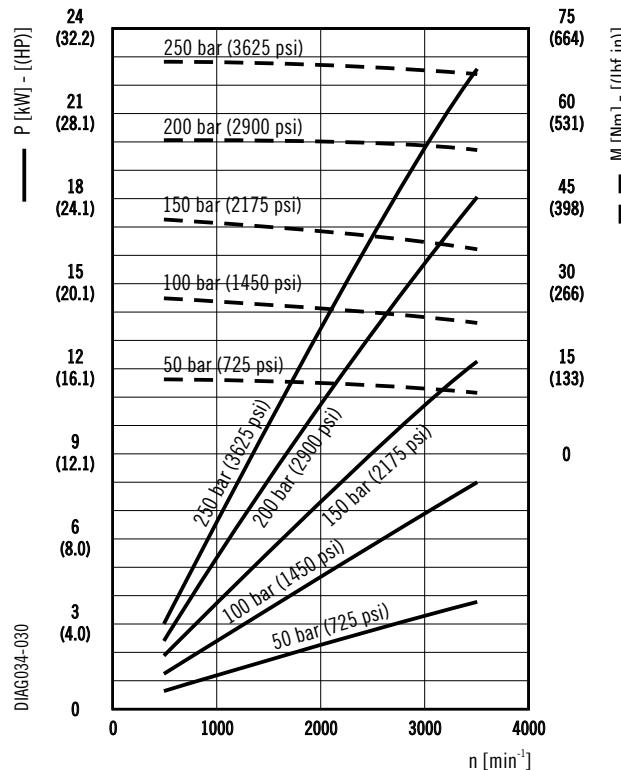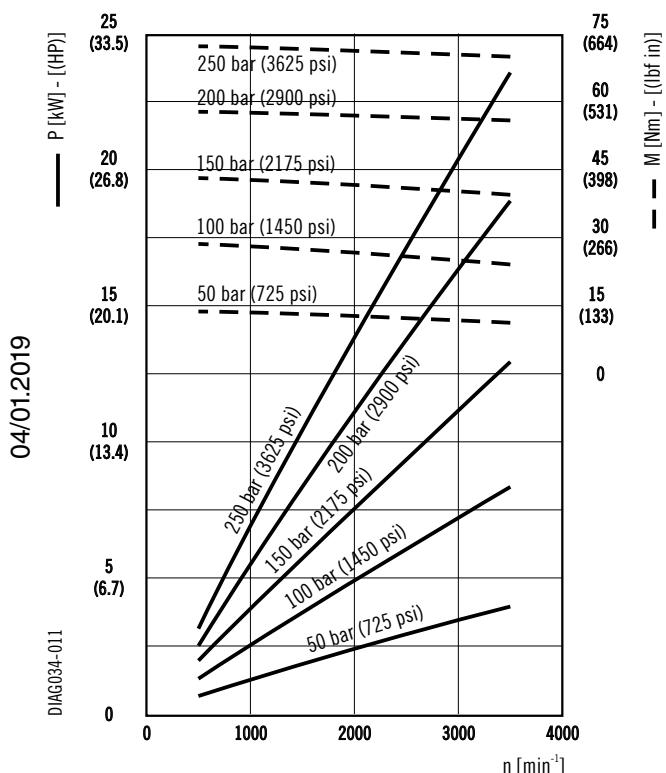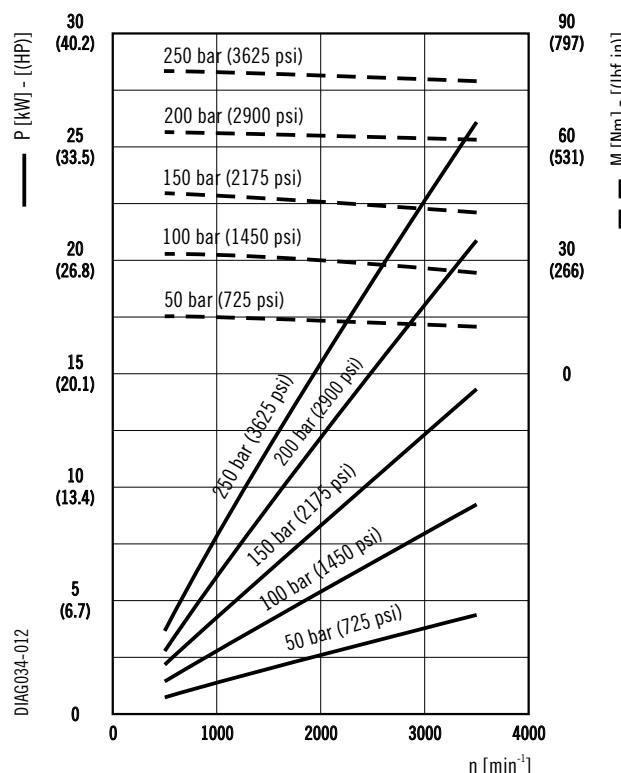PHM 20•16**PHM 20•18****PHM 20•19****PHM 20•20**

04/01/2019


DIAG034-011

GEAR MOTORS PERFORMANCE CURVES

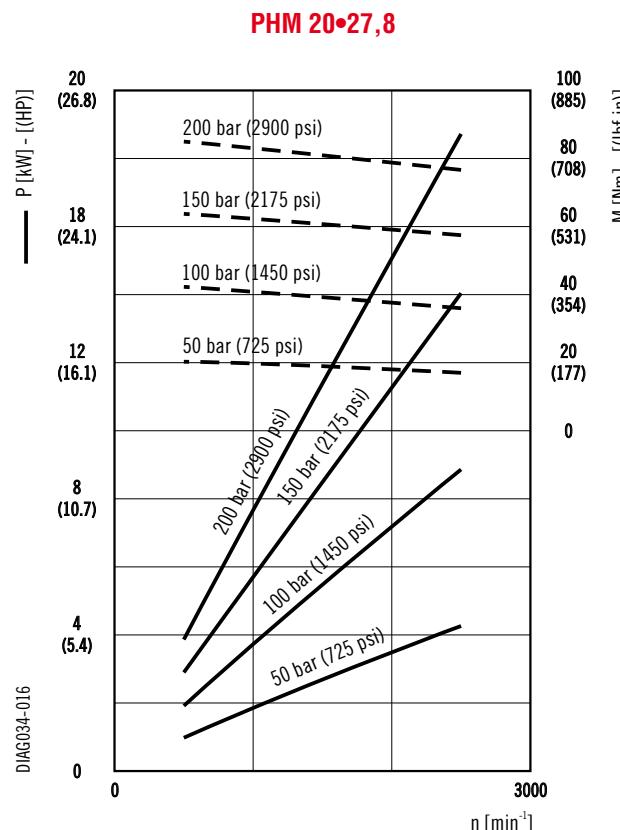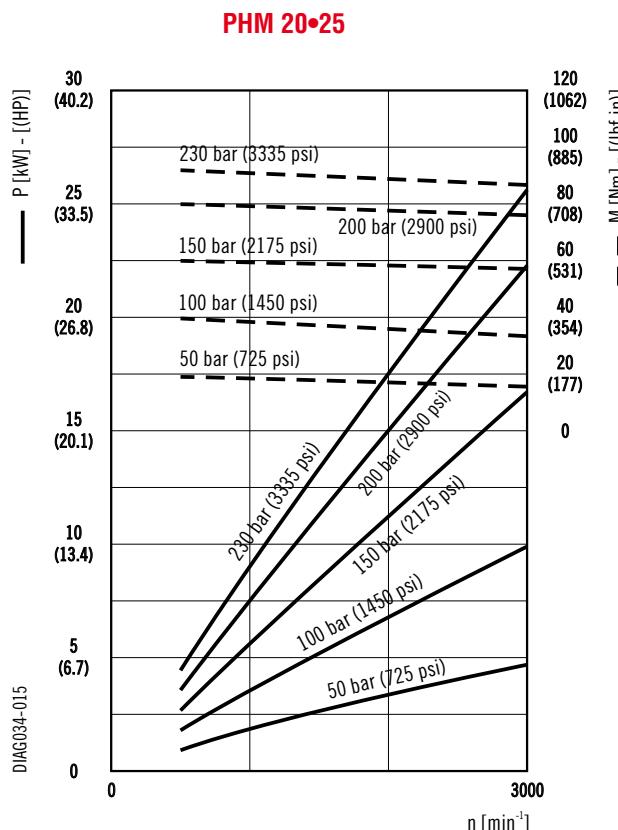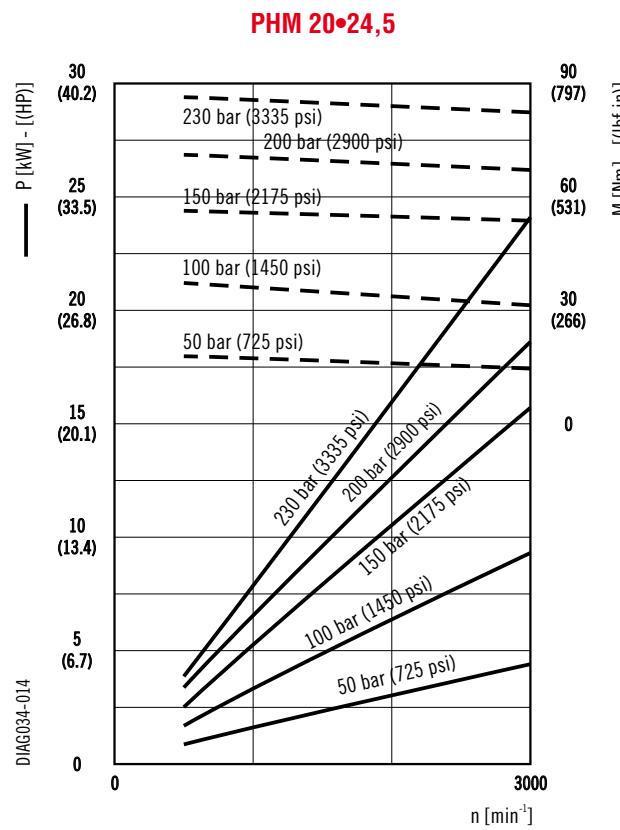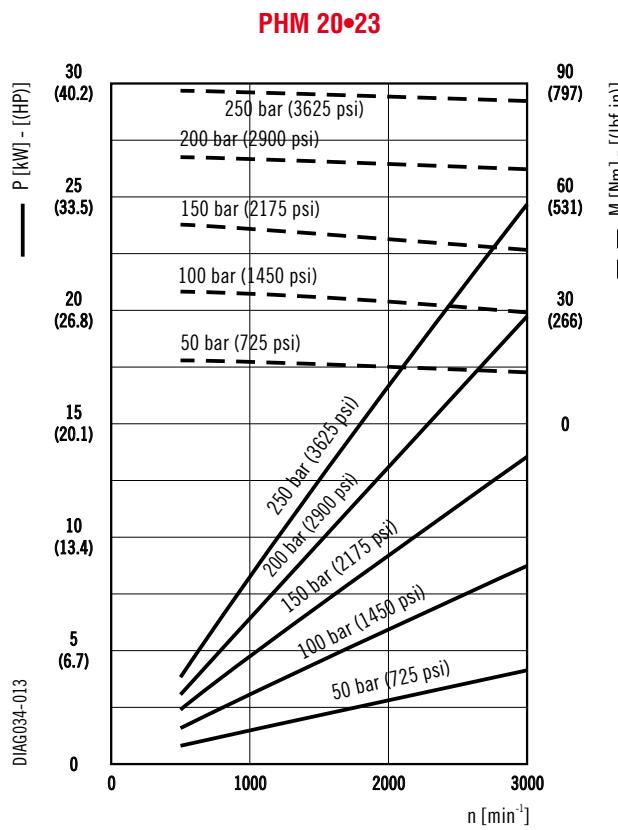

01/06/2009

GEAR MOTORS PERFORMANCE CURVES



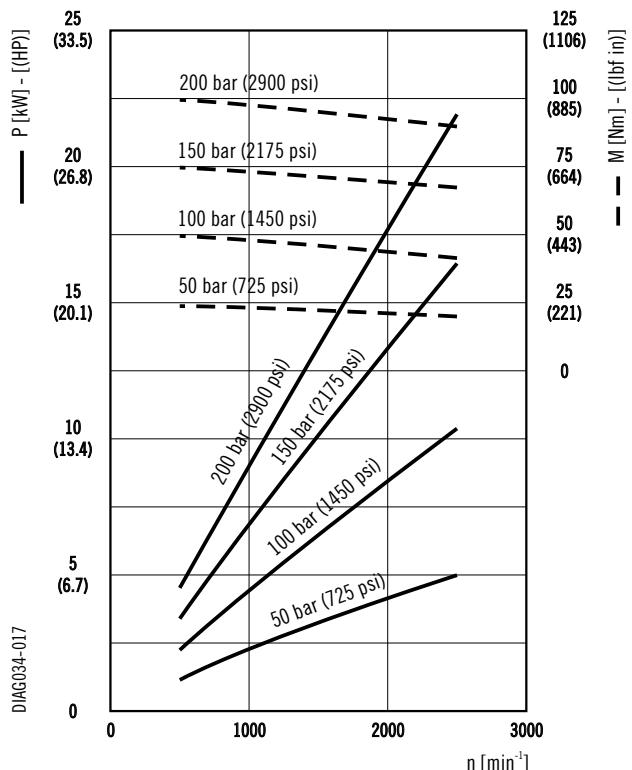
PHM 20•31,5


DAG034-017

01/06.2009



POLARIS PH**SINGLE UNITS DIMENSIONS - SIDE PORTS****L**

Drive shafts: page 31 ÷ 33

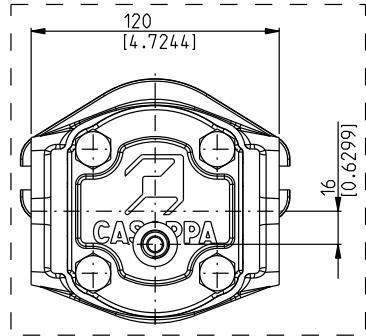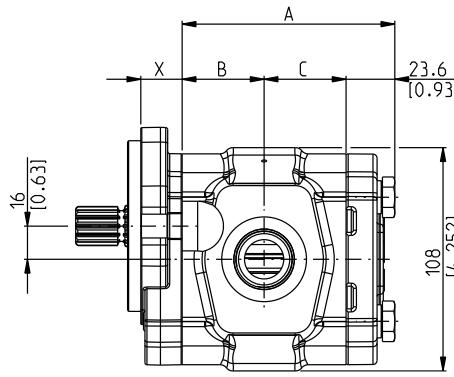Mounting flange: for X dimension see
page 34 ÷ 37Ports availability: European, Split, Gas,
SAE and German. See page 38**Reversible R****Single rotation S - D and Reversible B**

Replaces: 03/05/2012

DCAT034-002

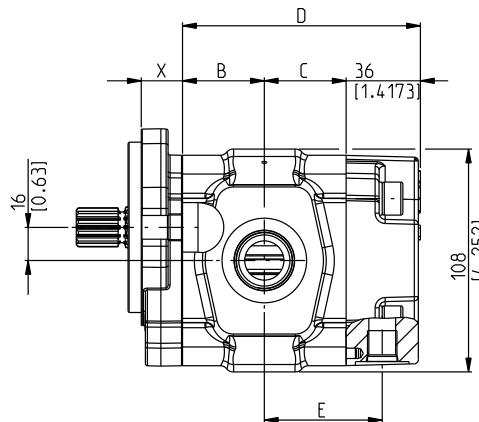**Reversible L**

For single rotation S - D, reversible B and R the rear cover is available in cast iron and aluminium.

For reversible rotation L the rear cover is in aluminium only.

Reversible L drain port position:
L = Side
*= Bottom

Pump type	A	B	C	D	E
Motor type	mm (inch)	mm (inch)	mm (inch)	mm (inch)	mm (inch)
PH. 20•8	80,1 (3.15)	32,5 (1.28)	24 (0.94)	92,5 (3.64)	41,5 (1.63)
PH. 20•10,5	84,1 (3.31)	36,5 (1.44)	24 (0.94)	96,5 (3.80)	41,5 (1.63)
PH. 20•11,2	84,6 (3.33)	37 (1.46)	24 (0.94)	97 (3.82)	41,5 (1.63)
PH. 20•14	89,6 (3.53)	42 (1.65)	24 (0.94)	102 (4.02)	41,5 (1.63)
PH. 20•16	93 (3.66)	34,7 (1.37)	34,7 (1.37)	105,4 (4.15)	52,2 (2.06)
PH. 20•18	95,3 (3.75)	47,5 (1.87)	24,2 (0.95)	107,7 (4.24)	41,7 (1.64)
PH. 20•19	96,4 (3.80)	36,4 (1.43)	36,4 (1.43)	108,8 (4.28)	53,9 (2.12)
PH. 20•20	99,6 (3.92)	38 (1.50)	38 (1.50)	112 (4.41)	55,5 (2.19)
PH. 20•23	102,8 (4.05)	39,6 (1.56)	39,6 (1.56)	115,2 (4.54)	57,1 (2.25)
PH. 20•24,5	105,2 (4.14)	40,8 (1.61)	40,8 (1.61)	117,6 (4.63)	58,3 (2.30)
PH. 20•25	107,6 (4.24)	42 (1.65)	42 (1.65)	120 (4.72)	59,5 (2.34)
PH. 20•27,8	110,2 (4.34)	43,3 (1.70)	43,3 (1.70)	122,6 (4.83)	60,8 (2.39)
PH. 20•31,5	117,6 (4.63)	47 (1.85)	47 (1.85)	130 (5.12)	64,5 (2.54)

04/01/2019






POLARIS PH**SINGLE UNITS DIMENSIONS - REAR PORTS****P**

Replaces: 03/05.2012

DCAT034-005

Drive shafts: page 31 ÷ 33
 Mounting flange: for X dimension see
 page 34 ÷ 37

Ports availability: Gas and SAE.
 See page 38

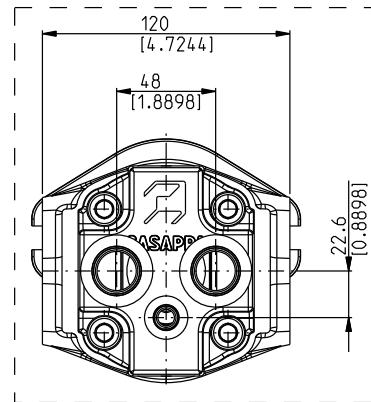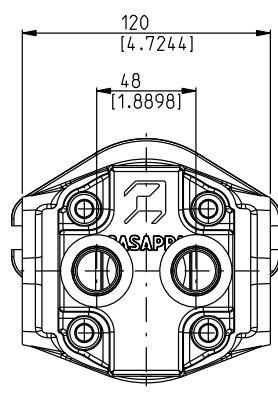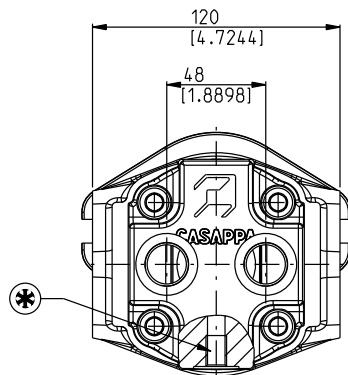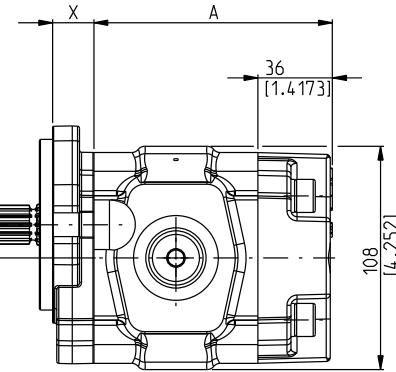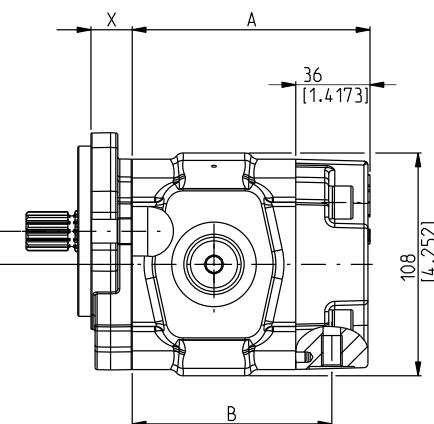**Reversible R****Single rotation S - D and Reversible B****Reversible L**

Rear cover in aluminium only.

 Reversible L drain port position:
 * = Bottom

04/01/2019

Pump type	A	B
Motor type	mm (inch)	mm (inch)
PH. 20•8	92,5 (3.64)	74 (.91)
PH. 20•10,5	96,5 (3.80)	78 (3.07)
PH. 20•11,2	97 (3.82)	78,5 (3.09)
PH. 20•14	102 (4.02)	83,5 (3.29)
PH. 20•16	105,4 (4.15)	86,9 (3.42)
PH. 20•18	107,7 (4.24)	89,2 (3.51)
PH. 20•19	108,8 (4.28)	90,2 (3.56)
PH. 20•20	112 (4.41)	93,5 (3.68)
PH. 20•23	115,2 (4.54)	96,7 (3.81)
PH. 20•24,5	117,6 (4.63)	99,1 (3.90)
PH. 20•25	120 (4.72)	101,5 (4.00)
PH. 20•27,8	122,6 (4.83)	104,1 (4.10)
PH. 20•31,5	130 (5.19)	111,5 (4.39)

MULTIPLE PUMPS

POLARIS PH series pumps can be coupled together in combination. Where the input power requirements of each section varies, that with the greater requirement must be at the drive shaft end, and progressively smaller to the rear.

Features and performances are the same as the corresponding single pumps, but pressures must be limited by the transmissible torque of the drive and connecting shafts. To have appropriate data, use the formula below.

The maximum rotational speed is the one of the lowest rated speed of the single units incorporated.

Available with common inlet and separated stages. For more information please consult our pre-sales department.

M	Nm (lbf in)	Torque
V	cm ³ /rev (in ³ /rev)	Displacement
Δp	bar (psi)	Pressure
$\eta_{hm} = \eta_{hm} (V, \Delta p, n)$	(≈ 0,88)	Hydro-mechanical efficiency

$$M = \frac{M_{theor.}}{\eta_{hm}} \text{ [Nm]}$$

$$M_{theor.} = \frac{\Delta p \text{ (bar)} \cdot V \text{ (cm}^3\text{/rev)}}{62,83} \text{ [Nm]}$$

Note


The torque absorbed from the shaft of the first pump results from the sum of the torques of all the single stages. The achieved value must not exceed the maximum torque limit given for the shaft of the first pump.

03/05.2012


INLET PORTS CONFIGURATION

Replaces: 03/05.2012

STANDARD VERSION

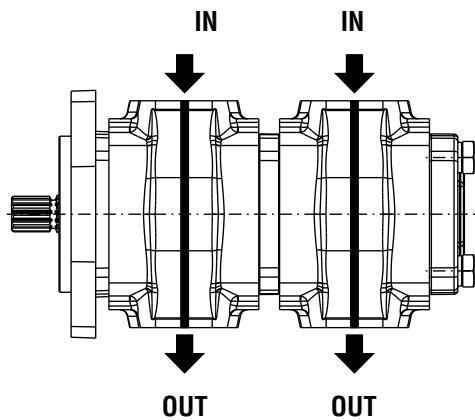

COMMON INLET

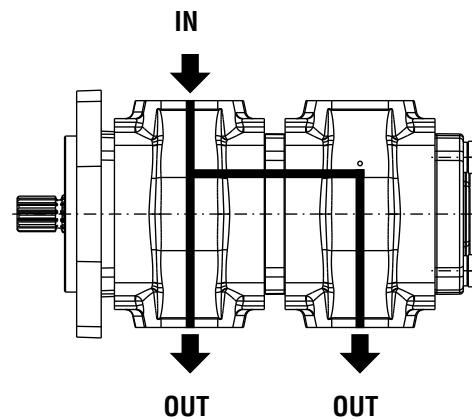

Reduced inlets provide overall systems savings by reducing the cost of redundant inlet hose and fittings.
For other combinations please consult our pre-sales department.

MULTIPLE PUMPS COMBINATION


PHP 20/20 **STANDARD VERSION**

\$6


PHP 20/20 **COMMON INLET VERSION**

\$7

Front

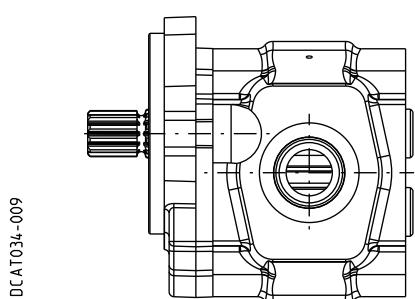

Rear

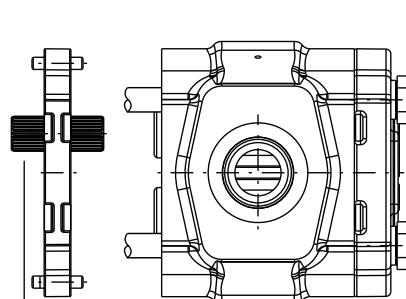

86 MAX 110 Nm (974 lbf in)


PHP 20/20 **SEPARATED STAGES VERSION**

Z6


04/01/2019

DCAT034-010


Front



O



Rear



86 MAX 110 Nm (974 lbf in)

MULTIPLE PUMPS COMBINATION


 PHP 20/PLP20 STANDARD VERSION
S6

PHP 20/PLP20 COMMON INLET VERSION


S7

DCAT034-011

Front




Rear

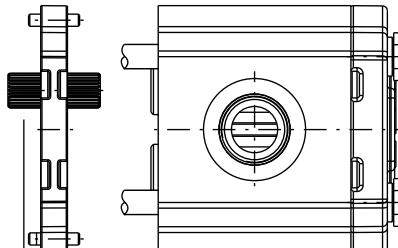
86 MAX 110 Nm (974 lbf in)

 PHP 20/PLP20 SEPARATED STAGES VERSION
Z6


DCAT034-012

Front



O

Rear

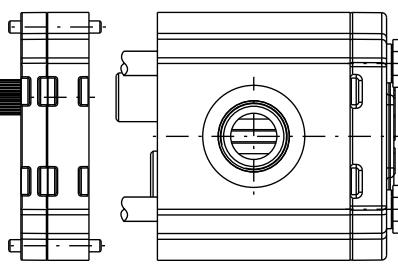
86 MAX 110 Nm (974 lbf in)


 PHP 20/PLP10 STANDARD VERSION
S6

PHP 20/PLP10 COMMON INLET VERSION


T7

DCAT034-013


Front



Rear

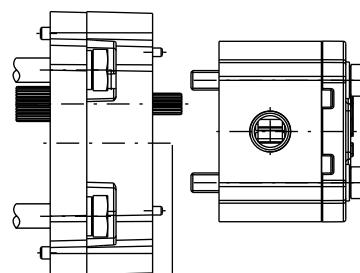
51 MAX 30 Nm (266 lbf in)

● 04/01/2019

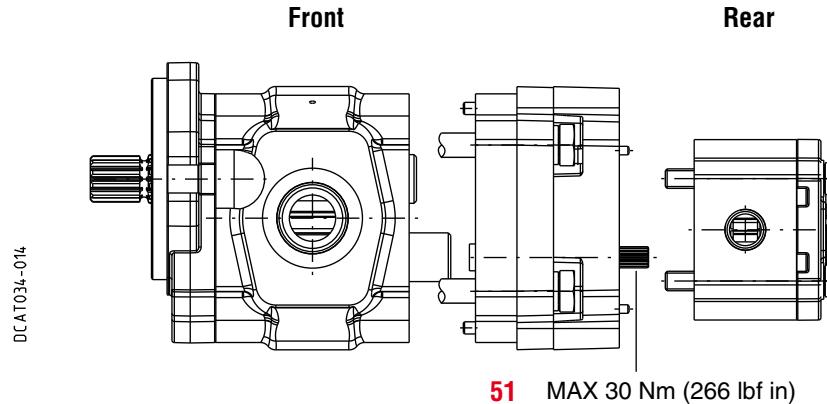MULTIPLE PUMPS COMBINATION**PHP 20/PLP10 SEPARATED STAGES VERSION****Z6**




POLARIS PH

MULTIPLE PUMPS DIMENSIONS

Drive shafts: page 31 ÷ 33
Mounting flange: for X dimension see
page 34 ÷ 37

Ports availability: European, Split, Gas,
SAE and German. See page 38

PHP 20/20

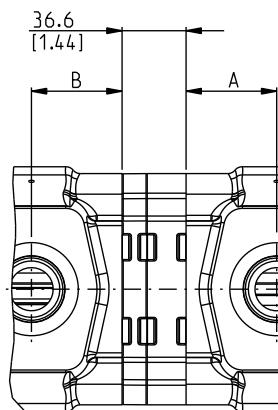
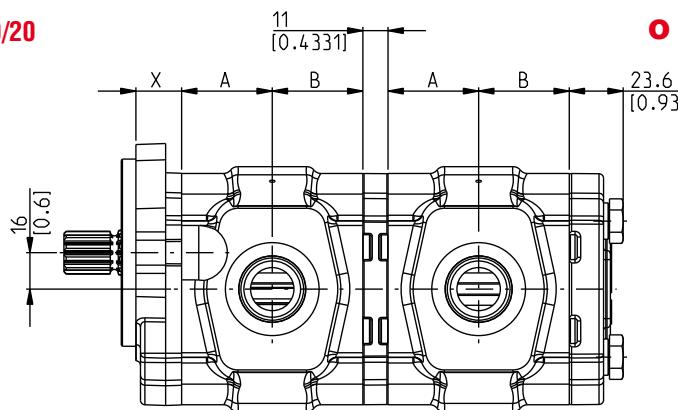
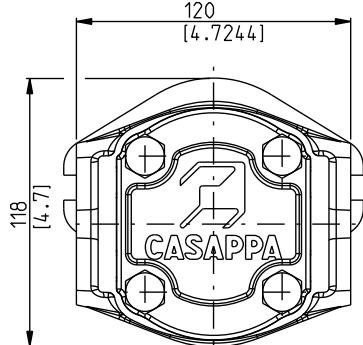


Replaces: 03/05/2012

Separated stages

DCAT034-015

PHP 20/PLP 20

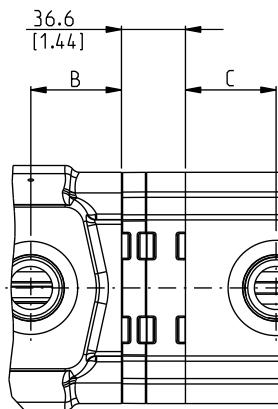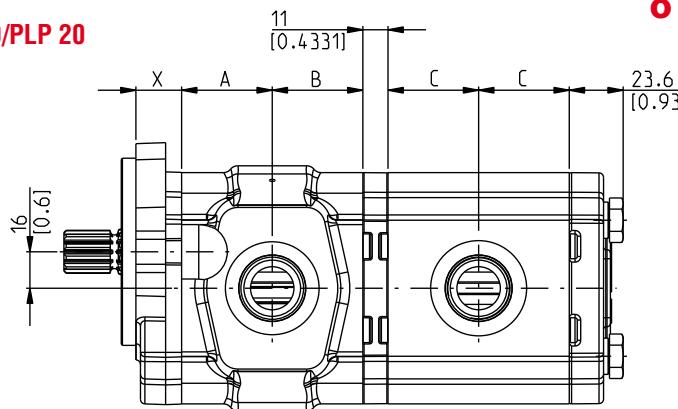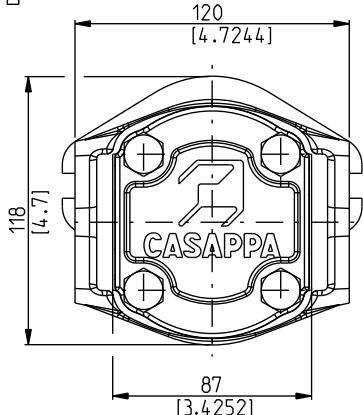

Separated stages

Rear cover in cast iron and aluminium.

Pump type	A mm (inch)	B mm (inch)
PH. 20•8 O	32,5 (1.28)	24 (0.94)
PH. 20•10,5 O	36,5 (1.44)	24 (0.94)
PH. 20•11,2 O	37 (1.46)	24 (0.94)
PH. 20•14 O	42 (1.65)	24 (0.94)
PH. 20•16 O	34,7 (1.37)	34,7 (1.37)
PH. 20•18 O	47,5 (1.88)	24,2 (0.95)
PH. 20•19	36,4 (1.43)	36,4 (1.43)
PH. 20•20	38 (1.50)	38 (1.50)
PH. 20•23	39,6 (1.56)	39,6 (1.56)
PH. 20•24,5	40,8 (1.61)	40,8 (1.61)
PH. 20•25	42 (1.65)	42 (1.65)
PH. 20•27,8	43,3 (1.70)	43,3 (1.70)
PH. 20•31,5	47 (1.85)	47 (1.85)

Pump type	C mm (inch)
PLP 20•4	25,7 (1.01)
PLP 20•6,3	27 (1.06)
PLP 20•7,2	27,5 (1.08)
PLP 20•8	28,2 (1.11)
PLP 20•9	28,9 (1.14)
PLP 20•10,5	30,2 (1.19)
PLP 20•11,2	30,5 (1.20)
PLP 20•14	33 (1.30)
PLP 20•16	34,7 (1.31)
PLP 20•19	36,4 (1.43)
PLP 20•20	38 (1.50)
PLP 20•24,5	40,8 (1.61)
PLP 20•25	42 (1.65)
PLP 20•27,8	43,3 (1.70)
PLP 20•31,5	47 (1.85)

04/01/2019

POLARIS PH




MULTIPLE PUMPS DIMENSIONS

Drive shafts: page 31 ÷ 33

Mounting flange: for X dimension see
page 34 ÷ 37

Ports availability: European, Split, Gas,
SAE and German. See page 38

Replaces: 03/05.2012

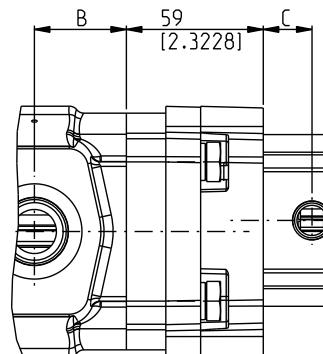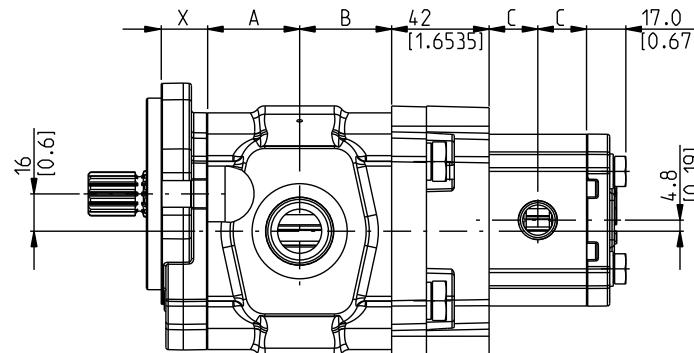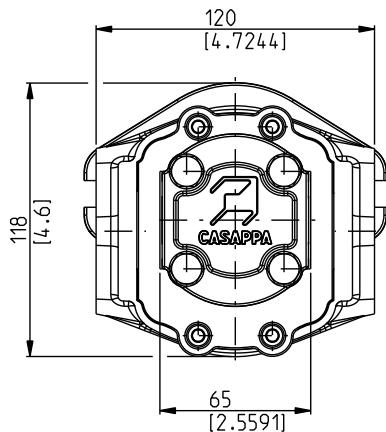

Separated stages

DCAT034-019

Rear cover in cast iron and aluminium.


04/01/2019

Pump type	A mm (inch)	B mm (inch)
PH. 20•8	32,5 (1.28)	24 (0.94)
PH. 20•10,5	36,5 (1.44)	24 (0.94)
PH. 20•11,2	37 (1.47)	24 (0.94)
PH. 20•14	42 (1.65)	24 (0.94)
PH. 20•16	34,7 (1.37)	34,7 (1.37)
PH. 20•18	47,5 (1.87)	24,2 (0.95)
PH. 20•19	36,4 (1.43)	36,4 (1.43)
PH. 20•20	38 (1.50)	38 (1.50)
PH. 20•23	39,6 (1.56)	39,6 (1.56)
PH. 20•24,5	40,8 (1.61)	40,8 (1.61)
PH. 20•25	42 (1.65)	42 (1.65)
PH. 20•27,8	43,3 (1.70)	43,3 (1.70)
PH. 20•31,5	47 (1.85)	47 (1.85)


Pump type	C mm (inch)
PLP 10•1	17,6 (0.69)
PLP 10•1,5	18,4 (0.72)
PLP 10•2	19,2 (0.76)
PLP 10•2,5	20 (0.79)
PLP 10•3,15	21 (0.83)
PLP 10•4	22,4 (0.88)
PLP 10•5	24 (0.94)
PLP 10•5,8	25,3 (1.00)
PLP 10•6,3	26 (1.02)
PLP 10•8	28,7 (1.13)
PLP 20•10	32 (1.26)

OUTBOARD BEARING OPTIONS


For each version, the possible combination between drive shafts and mounting flanges are shown on pages 34 ÷ 37.
For the outboard bearing life expectancy, diagrams providing approximate selection data will be found on subsequent pages.
For particular applications please consult our pre-sales department.

VERSION**0**

D033- 116 / 0603

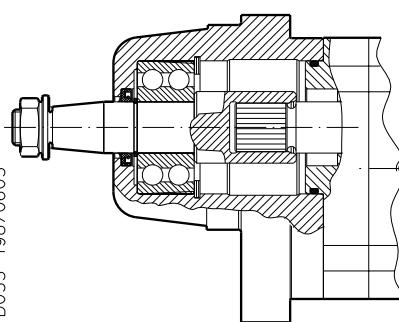
VERSION**W8**

D033- 198 / 0603


VERSION**4**

D003- 192 / 0603


Version for applications without radial and axial load on the drive shaft.

VERSION**5**


D033- 191 / 0603

VERSION**6**


D033- 193 / 0603

VERSION**7**

D033- 194 / 0603

VERSION**8**

D033- 195 / 0603


VERSION**9**

D003- 196 / 0603

01/06.2009

PH 20**VERSION WITH OUTBOARD BEARING****W8**

Replaces: 01/06.2009

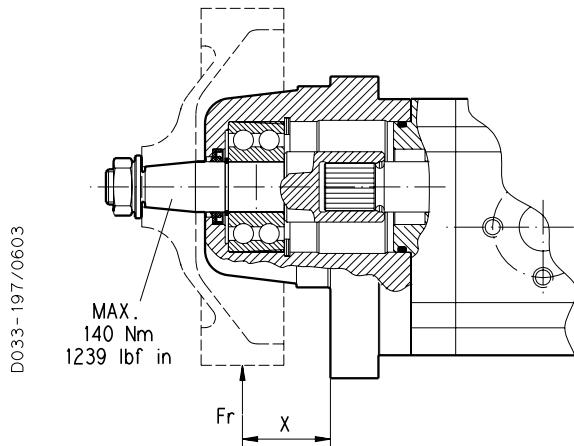

X = Distance of the radial load result from the mounting flange [mm (in)].

Each curve has been obtained at:

- Lubricant oil ISO VG 46
- Temperature 60 °C (140 °F)
- Without axial load
- Contamination level according ISO 281: $\beta_{12}(C) = 200$
- Reliability level of the calculation 90%

Example



Fr Radial load	1900 N (427.5 lbf)
----------------	--------------------

X	20 mm (0.79 in)
---	-----------------

Speed	2000 min ⁻¹
-------	------------------------


Rated fatigue life	≈ 3050 h
--------------------	----------

Values shown in the diagrams are indicative only. For more information please consult our pre-sales department.

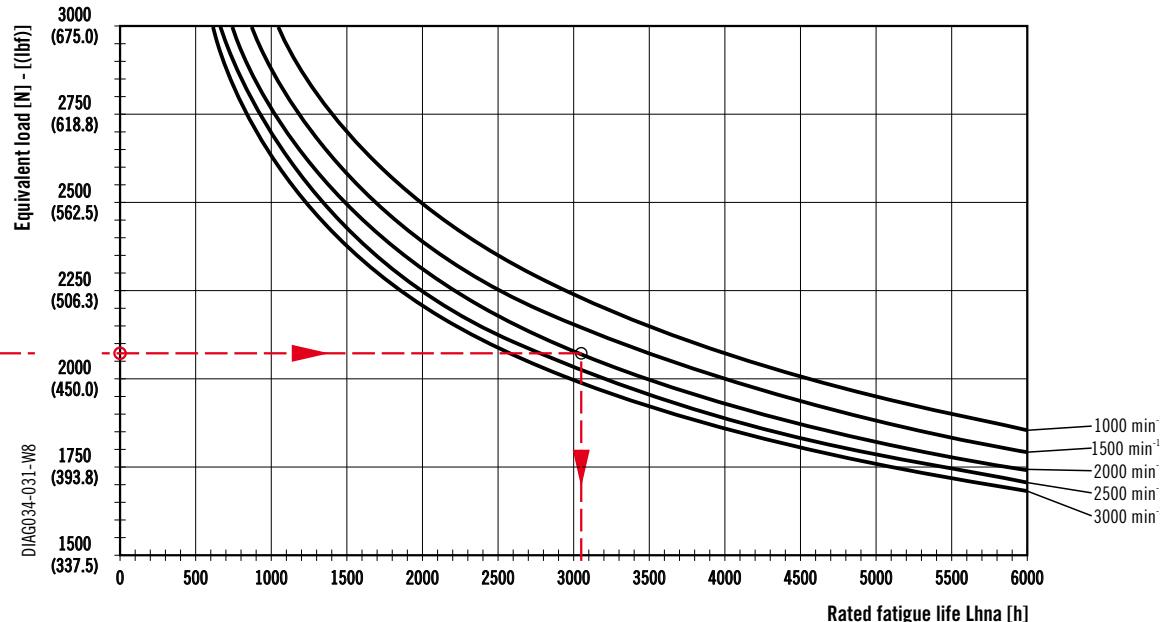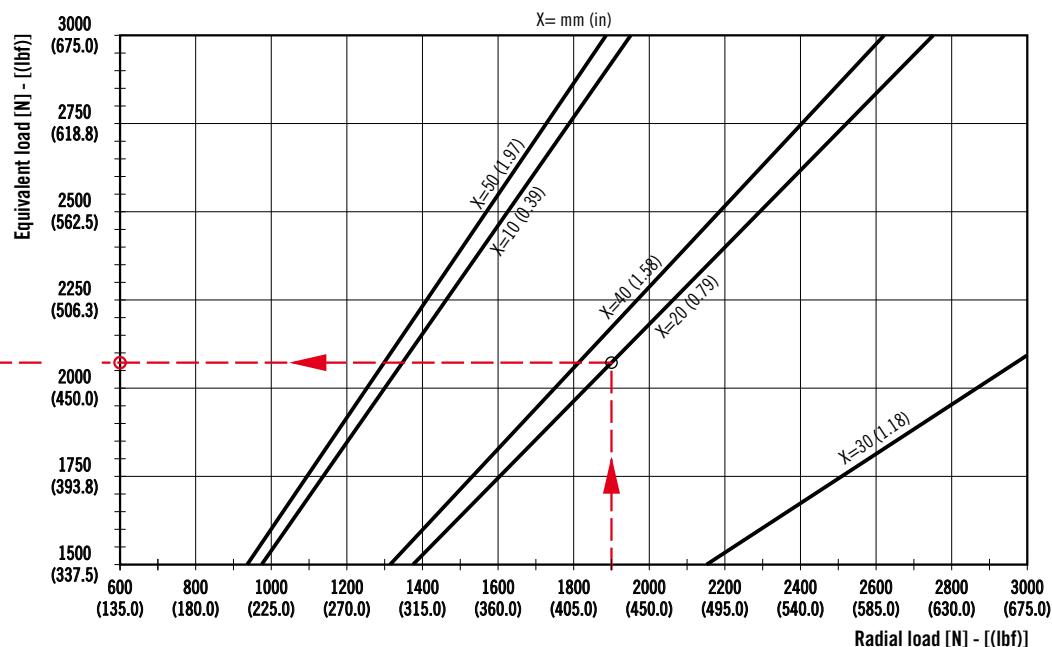

04/01/2019

D003-114/0603

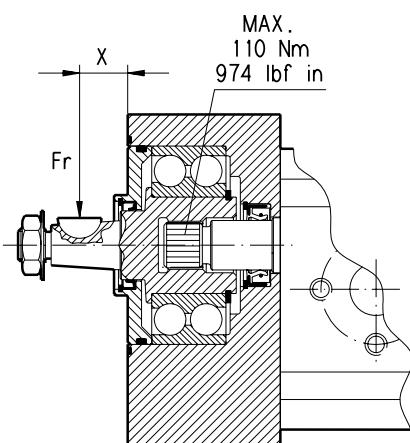

X = Distance of the radial load result from the mounting flange [mm (in)].

Each curve has been obtained at:

- Lubricant grease
- Temperature 60 °C (140 °F)
- Without axial load
- Contamination level according ISO 281: $B_{12}(C) = 200$
- Reliability level of the calculation 90%

Example

Fr Radial load	1700 N (382.5 lbf)
----------------	--------------------

X	20 mm (0.79 in)
---	-----------------


Speed	2000 min ⁻¹
-------	------------------------

Rated fatigue life	≈ 2100 h
--------------------	----------

Values shown in the diagrams are indicative only. For more information please consult our pre-sales department.


Replaces: 01/06/2009

04/01/2019

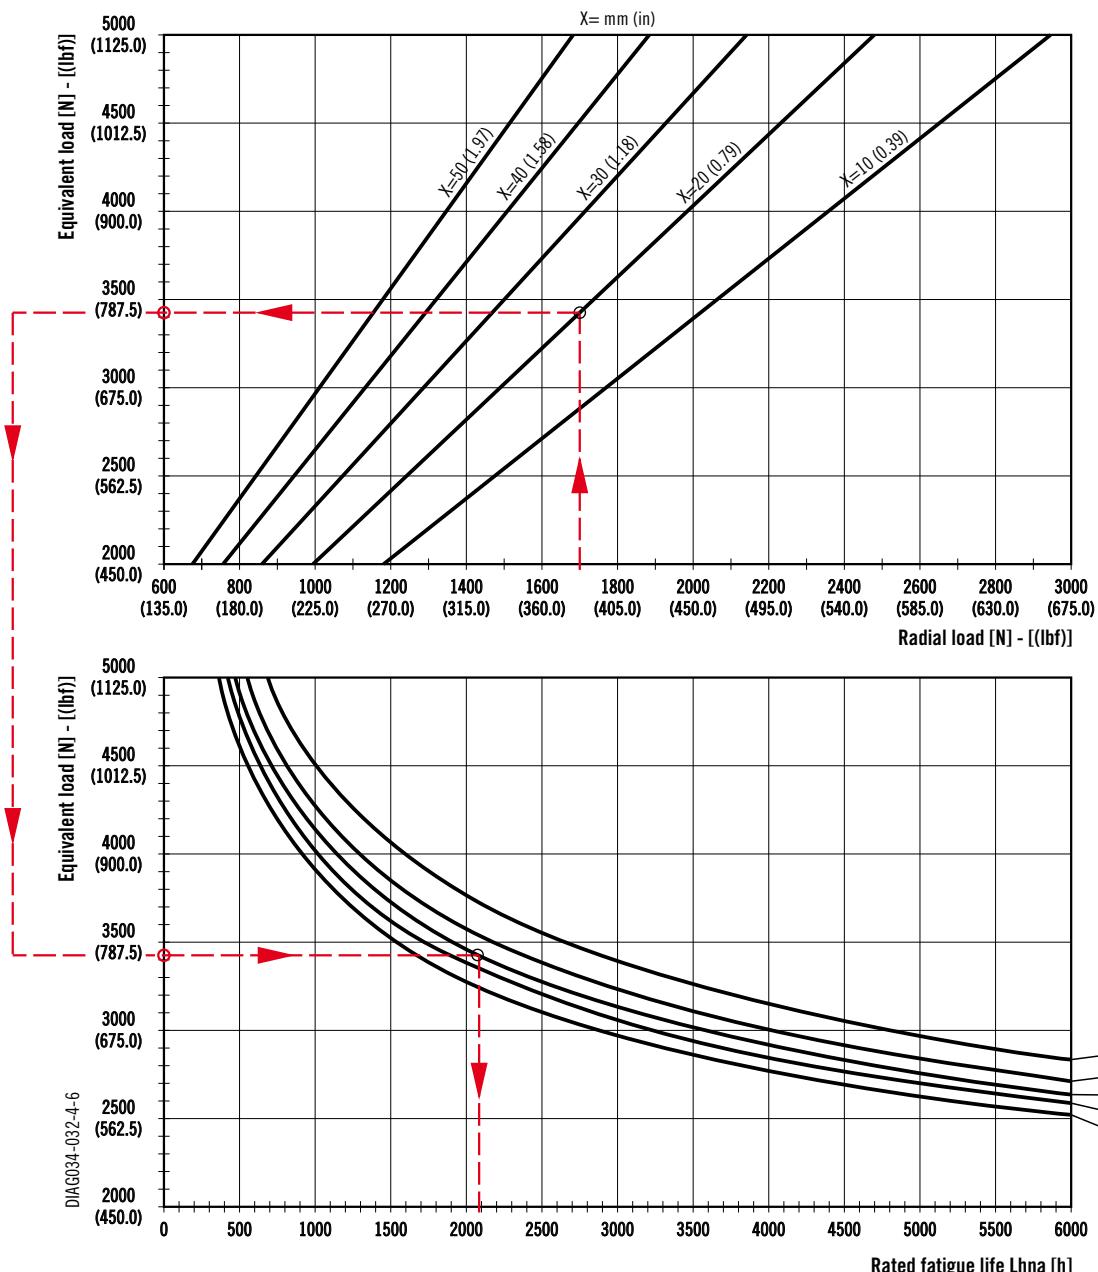

Replaces: 01/06.2009

D033-115/0603

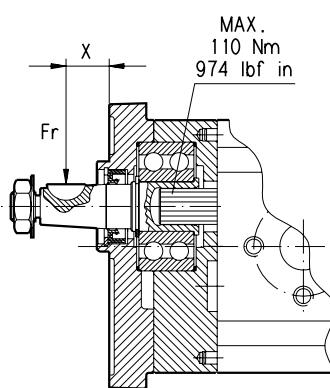

X = Distance of the radial load result from the mounting flange [mm (in)].



Each curve has been obtained at:

- Lubricant oil ISO VG 46
- Temperature 60 °C (140 °F)
- Without axial load
- Contamination level according ISO 281: $\beta_{12}(C) = 200$
- Reliability level of the calculation 90%

Example


Fr Radial load	850 N (191.3 lbf)
X	20 mm (0.79 in)
Speed	2000 min ⁻¹
Rated fatigue life	≈ 2100 h

Values shown in the diagrams are indicative only. For more information please consult our pre-sales department.

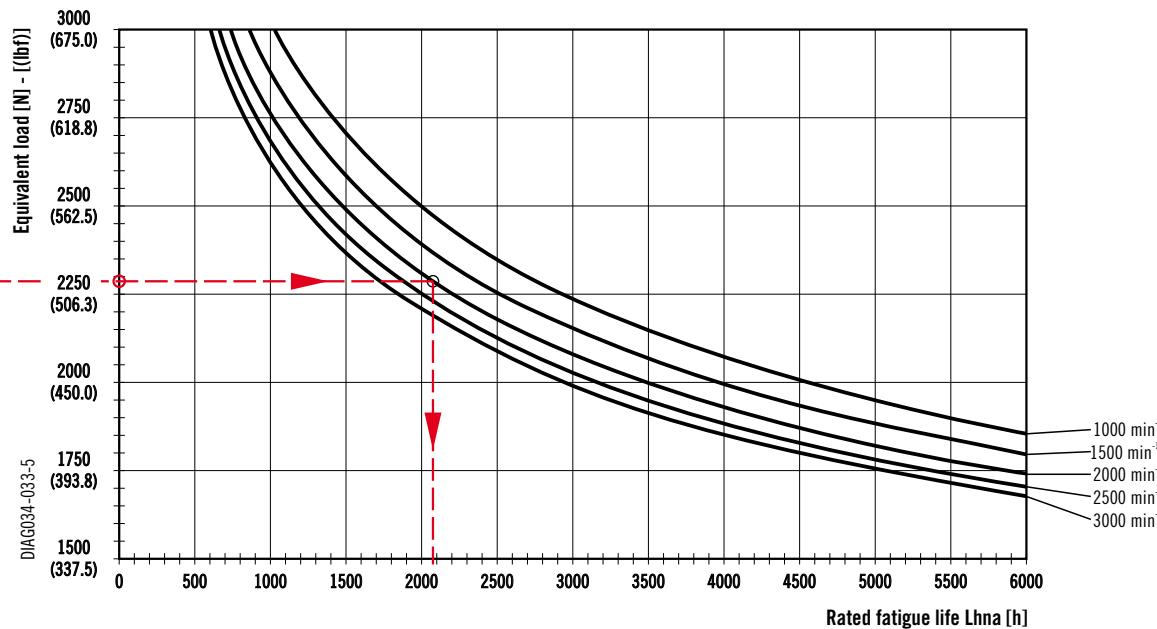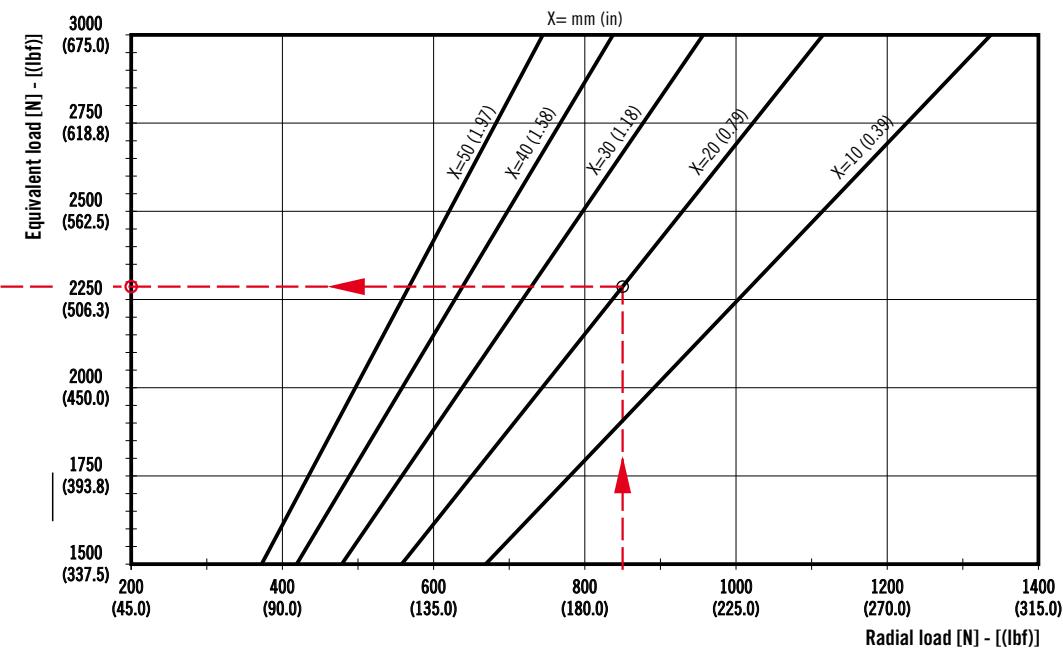

04/01/2019

D033-118/0603

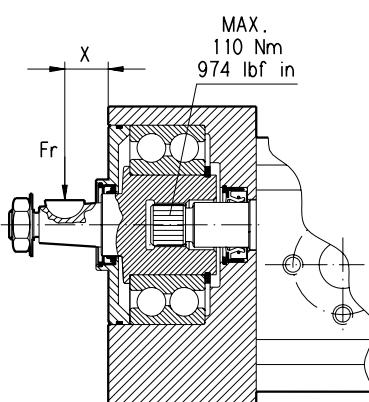

X = Distance of the radial load result from the mounting flange [mm (in)].

Each curve has been obtained at:

- Lubricant grease
- Temperature 60 °C (140 °F)
- Without axial load
- Contamination level according ISO 281: $B_{12}(C) = 200$
- Reliability level of the calculation 90%

●

Example

Fr Radial load	1900 N (427.5 lbf)
----------------	--------------------

X	20 mm (0.79 in)
---	-----------------



Speed	2000 min ⁻¹
-------	------------------------

Rated fatigue life	≈ 4600 h
--------------------	----------

Values shown in the diagrams are indicative only. For more information please consult our pre-sales department.

Replaces: 01/06/2009

04/01/2019

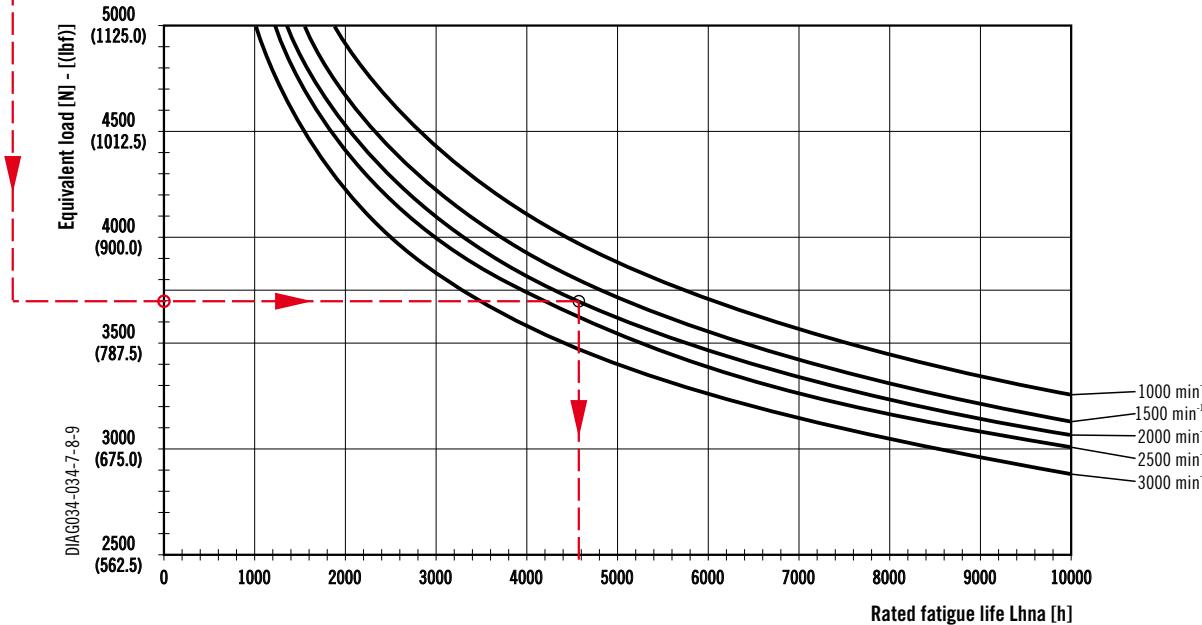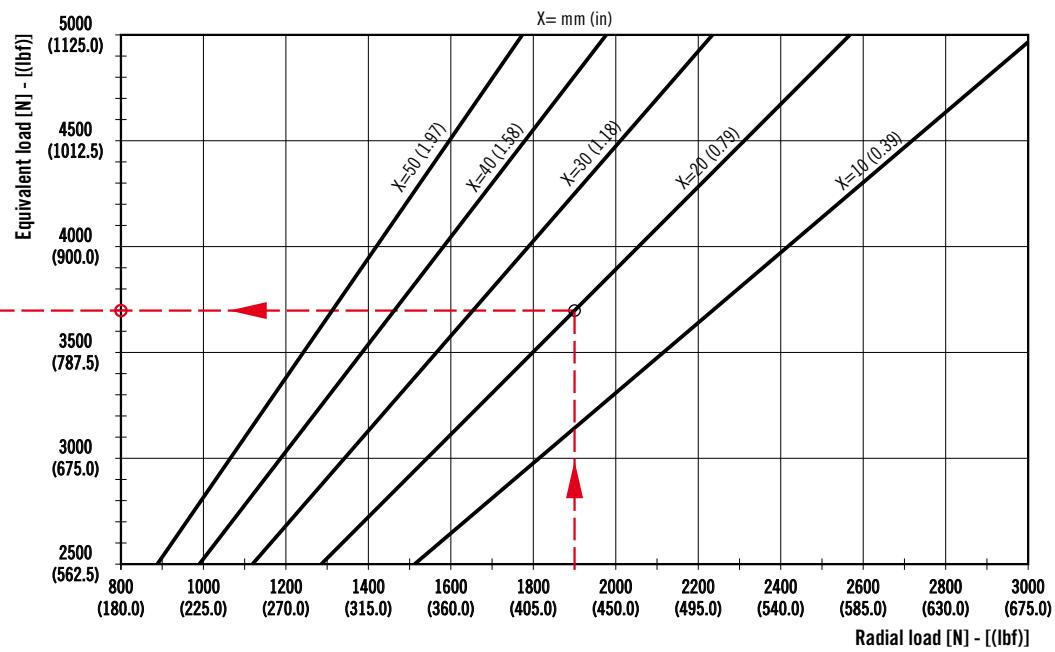

DRIVE SHAFTS


SAE SPLINE

07

Mounting face refer to flange code S9

O

DCAT_033_006_27720966

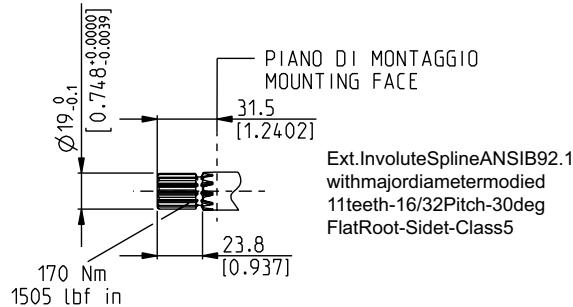

STRAIGHT


49

Not available with size:

20•19 - 20•24,5

Mounting face refer to flange code S9

DCAT_033_002_02004743

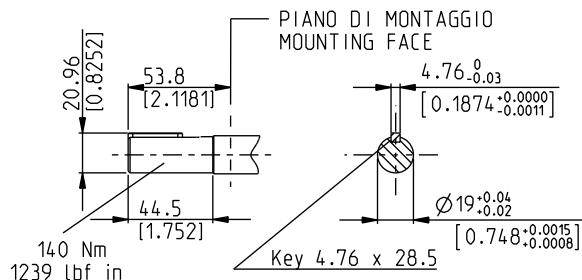


SAE "B" SPLINE

04

Mounting face refer to flange code S5

O

DCAT_033_007_27720292

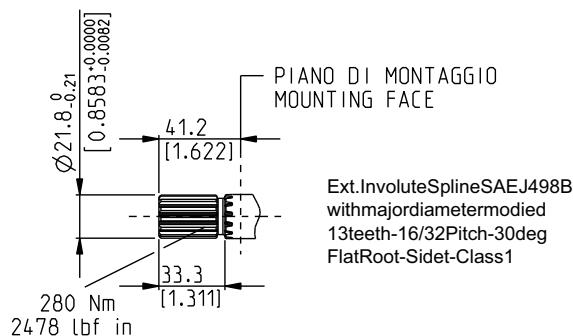

SAE "A" STRAIGHT

31


Not available with size:

20•24,5 - 20•27,8

Mounting face refer to flange code S9

O

DCAT_033_001_02004706

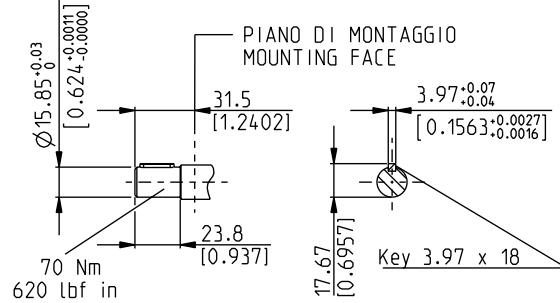


STRAIGHT

50

Mounting face refer to flange code S9

O

DCAT_033_004_019986C

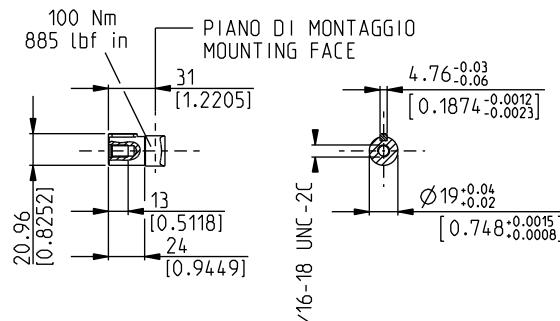

SAE "B" STRAIGHT

32


Not available with size:

20•24,5

Mounting face refer to flange code S5

O

DCAT_033_003_03571379

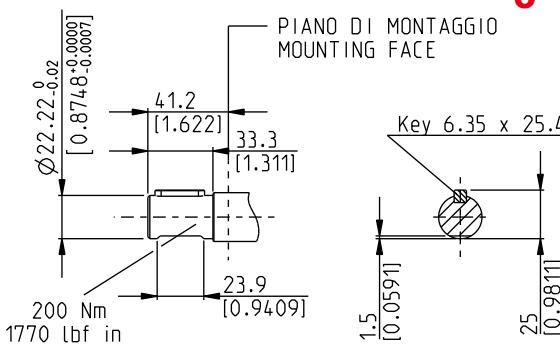

DRIVE SHAFTS

DIN 5482 SPLINE


12

Mounting face refer to flange code B2

O

Replaces: 01/06.2009

DCAT_033_008_27721460

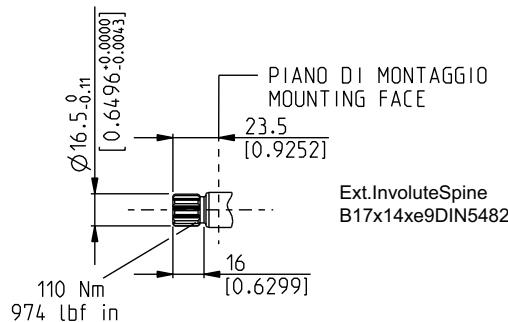


STRAIGHT

B1

Only for version 8 and 5 with outboard bearing
Mounting face refer to flange code E2

DCAT_033_032

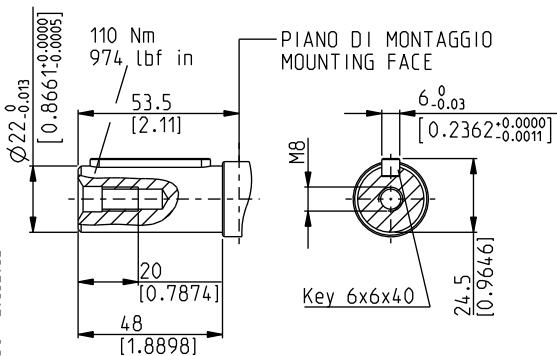


STRAIGHT

48

Only for version 6 with outboard bearing
Available in 0 version only with size:

20•20

Mounting face refer to flange code B2

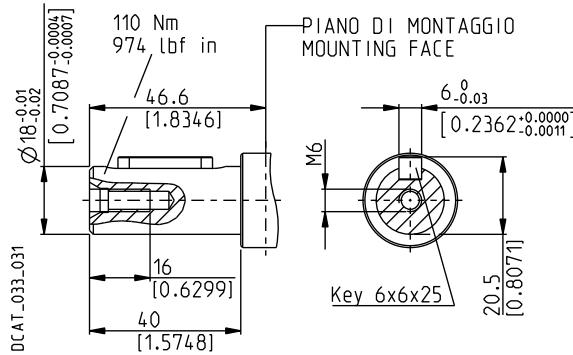

TANG

95


Not available with size:

20•24,5

Mounting face refer to flange code B6

O

DCAT_033_02004680

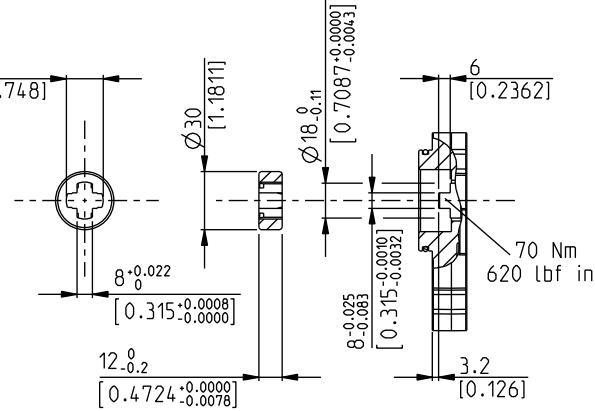


O 04/01/2019

MOUNTING FLANGES AND TABLE OF COMPATIBILITY

EUROPEAN

E2

Material: cast iron and aluminium

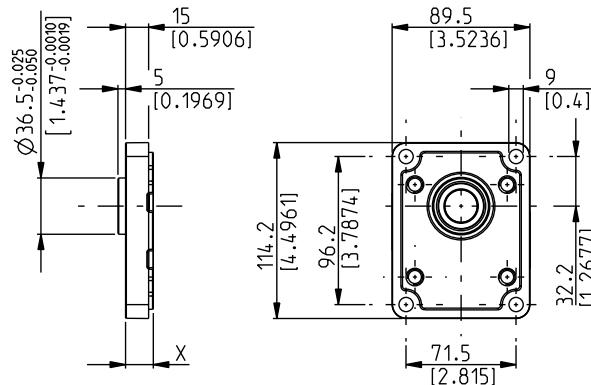

DRIVE SHAFTS

See page 31 ÷ 33

VERSIONS See page 26	X mm (in)	82	46	B1	03	04	07	12	31	48	49	50	54
0	18 (0.71)	#	#		X	X	X	X	X	X	X	X	X
4	55,4 (2.18)	#											
5	43,6 (1.72)	#		X	X						X	X	X
6	55,4 (2.18)										#		
7	59,4 (2.34)	#											
8	59,4 (2.34)				#								


Standard combination

X Available combination

GERMAN

B2

Material: cast iron and aluminium

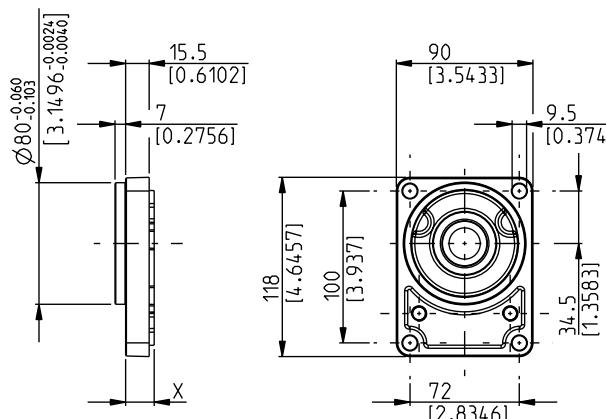

DRIVE SHAFTS

See page 31 ÷ 33

VERSIONS See page 26	X mm (in)	12	54	55	01	03	31	46	49	82
0	18,8 (0.74)	#	#		X	X	X	X	X	X
5	44,4 (1.75)		X	X		X			X	X
9	59,4 (2.34)				X					

Standard combination

X Available combination

01/06/2009

MOUNTING FLANGES AND TABLE OF COMPATIBILITY


GERMAN 2 BOLTS

B4

Material: cast iron and aluminium

 Through hole

DCAT_033_020_21912051

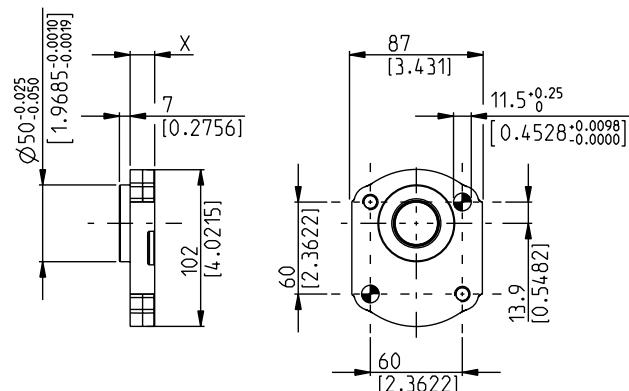

DRIVE SHAFTS

See page 31 ÷ 33

VERSIONS See page 26	X mm (in)	54	03	12	31	49	82
0	16 (0.63)	#	x	x	x	x	x
5	41,6 (1.64)	x	x			x	x

Standard combination

X Available combination


GERMAN 2 BOLTS

B5

Material: cast iron and aluminium

 Through hole

DCAT_033_021_21912256

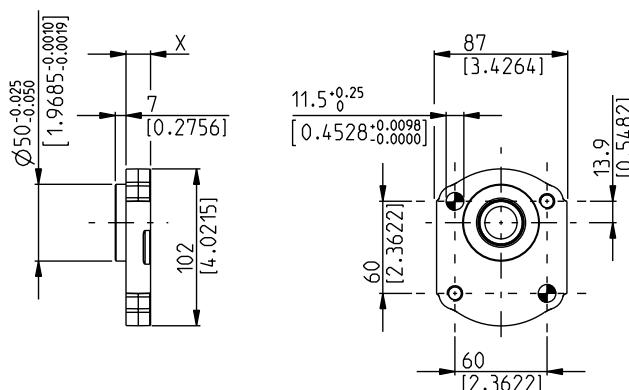

DRIVE SHAFTS

See page 31 ÷ 33

VERSIONS See page 26	X mm (in)	54	03	12	31	49	82
0	16 (0.63)	#	x	x	x	x	x
5	41,6 (1.64)	x	x			x	x

Standard combination

X Available combination


MOUNTING FLANGES AND TABLE OF COMPATIBILITY

GERMAN 4 BOLTS

B6

Material: cast iron and aluminium

● Through hole

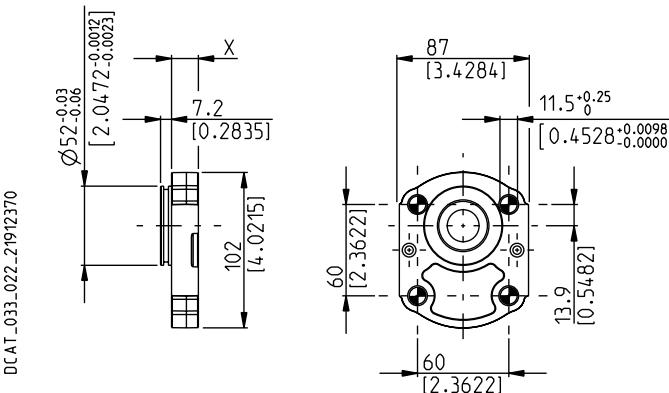

DRIVE SHAFTS

See page 32 ÷ 33

VERSIONS See page 26	X mm (in)	95	07	12
0	17,7 (0.70)	#	X	X
5	43,3 (1.70)	X		


Standard combination

X Available combination

SAE "A" 2 BOLTS

S9

Material: cast iron and aluminium

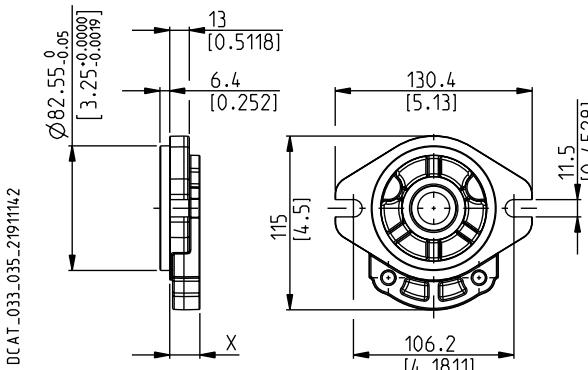

01/06/2009

DRIVE SHAFTS

See page 31 ÷ 33

VERSIONS See page 26	X mm (in)	01	02	04	07	12	31	32	46	49	50	54	82
0	20 (0.79)	#	#	x	#	x	#	x	x	#	x	x	x
5	45,6 (1.80)		#						x	x	x	x	x

Standard combination


X Available combination

MOUNTING FLANGES AND TABLE OF COMPATIBILITY

SAE "B" 2 BOLTS

S5

Material: cast iron

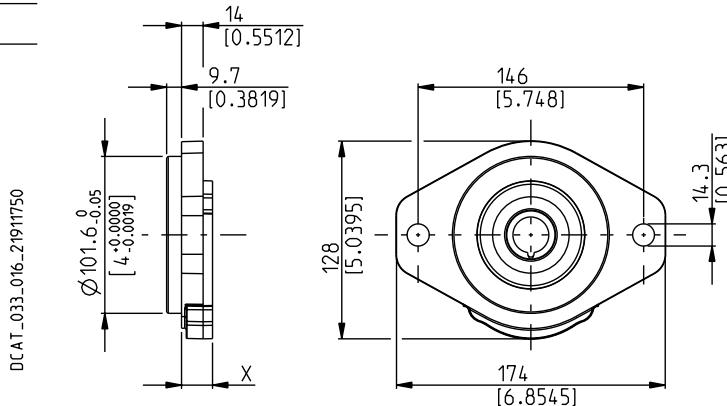

DCAT_033_016_21917750

DRIVE SHAFTS

See page 32

VERSIONS See page 26	X mm (in)	04	32	49
0	20 (0.79)	#	#	X
5	45,6 (1.80)			X


Standard combination

X Available combination

GERMAN

W8

Material: cast iron

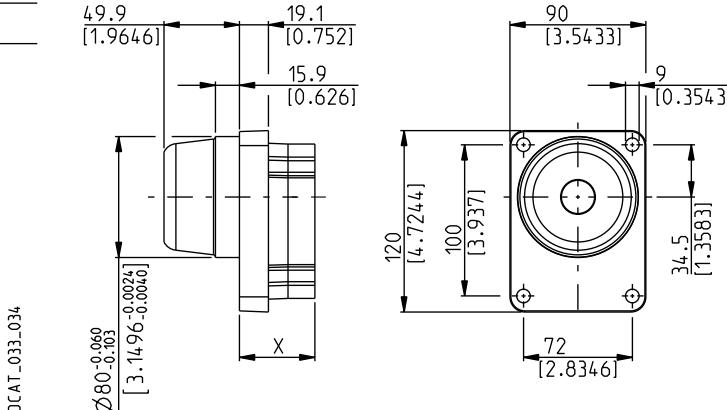

DCAT_033_034

DRIVE SHAFTS


See page 31

VERSIONS See page 26	X mm (in)	55
W8	49,8 (1.96)	#

Standard combination

X Available combination

PORTS POSITION AND TYPE

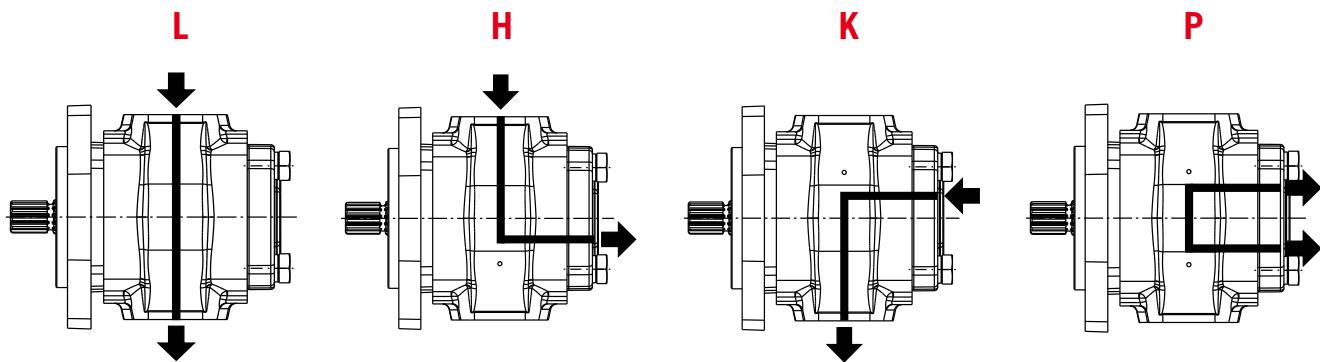

Replaces: 01/06.2009

PORTS TYPE	SIDE PORTS										REAR PORTS						
	European		Split SSM		Split SSS		Gas BSPP		SAE ODT		German		Gas BSPP		SAE ODT		
Pump type	IN	OUT	IN	OUT	IN	OUT	IN	OUT	IN	OUT	IN	OUT	IN	OUT	IN	OUT	
Motor type	OUT	IN	OUT	IN	OUT	IN	OUT	IN	OUT	IN	OUT	IN	OUT	OUT	IN	OUT	
PHP 20•8	○	EA	EA	MA	MA	SA	SA	GD	GD	OC	OC	BE	BC	GD	GD	OC	OC
PHP 20•10,5	○	EA	EA	MA	MA	SA	SA	GD	GD	OC	OC	BE	BC	GD	GD	OC	OC
PHP 20•11,2	○	EA	EA	MA	MA	SA	SA	GD	GD	OC	OC	BE	BC	GD	GD	OC	OC
PHP 20•14	○	EB	EA	MB	MA	SB	SA	GE	GD	OD	OC	BE	BC	GE	GD	OD	OC
PHP 20•16	○	EB	EA	MB	MA	SB	SA	GE	GD	OD	OC	BE	BC	GE	GD	OD	OC
PHP 20•18	○	EB	EA	MB	MA	SB	SA	GE	GD	OD	OC	BE	BC	GE	GD	OD	OC
PHP 20•19		EB	EA	MB	MA	SB	SA	GE	GD	OD	OC	BE	BC	GE	GD	OD	OC
PHP 20•20		EB	EA	MB	MA	SB	SA	GE	GD	OD	OC	BE	BC	GE	GD	OD	OC
PHP 20•23		EB	EA	MC	MB	SC	SB	GF	GD	OF	OC	BE	BC	GE	GD	OD	OC
PHP 20•24,5		EB	EA	MC	MB	SC	SB	GF	GD	OF	OC	BE	BC	GE	GD	OD	OC
PHP 20•25		EB	EA	MC	MB	SC	SB	GF	GD	OF	OC	BE	BC	GE	GD	OD	OC
PHP 20•27,8		EB	EA	MC	MB	SC	SB	GF	GD	OF	OC	BE	BC	GE	GD	OD	OC
PHP 20•31,5		EB	EA	MC	MB	SC	SB	GF	GD	OF	OC	BE	BC	GE	GD	OD	OC

Different inlet and outlet ports are available.

For more information please consult our pre-sales department.

● 04/01/2019

EXTERNAL DRAIN PORTS

IN/OUT PORTS TYPE	SIDE PORTS							REAR PORTS	
	German	European	Split SSM	Split SSS	Gas BSPP	SAE ODT	Gas BSPP	SAE ODT	
PHP 20	TA	GB	GB	03	GB	03	GB	03	

Dimensions on page 42

PORT SIZES

 Tightening torque for low pressure side port.

 Tightening torque for high pressure side port.

For reversible rotation, please consult only the tightening torque for high pressure side port.


EUROPEAN FLANGED PORTS - 4 Bolts

EUROPEAN

Metric thread ISO 60° conforms to ISO/R 262

CODE	A	B	C		
	mm (in)	mm (in)	Thread Depth mm (in)	Nm (lbf in)	Nm (lbf in)
EA	13 (0.51)	30 (1.18)	M 6 13 (0.51)	8 ^{+0,5} (71 ÷ 75)	8 ^{+0,5} (71 ÷ 75)
EB	19 (0.75)	40 (1.57)	M 8, 14 (0.55)	15 ⁺¹ (133 ÷ 142)	20 ⁺¹ (177 ÷ 186)

DCAT_006_024_21060533



SAE FLANGED PORTS J518 - Standard pressure series 3000 PSI


SSM

Metric thread ISO 60° conforms to ISO/R 262

01/06/2009

CODE	A	B	C	D		
	mm (in)	mm (in)	mm (in)	Thread Depth mm (in)	Nm (lbf in)	Nm (lbf in)
MA	12,5 (0.49)	38,1 (1.50)	17,5 (0.69)	M 8 14 (0.55)	15 ⁺¹ (133 ÷ 142)	15 ⁺¹ (133 ÷ 142)
MB	19 (0.75)	47,6 (1.87)	22,2 (0.87)	M 10 14 (0.55)	20 ⁺¹ (177 ÷ 186)	25 ⁺¹ (266 ÷ 288)
MC	25,4 (1.00)	52,4 (2.06)	26,2 (1.03)	M 10 14 (0.55)	20 ⁺¹ (177 ÷ 186)	25 ⁺¹ (266 ÷ 288)

DCAT_006_025_21064252



PORT SIZES

 Tightening torque for low pressure side port.

 Tightening torque for high pressure side port.

For reversible rotation, please consult only the tightening torque for high pressure side port.


SAE FLANGED PORTS J518 - Standard pressure series 3000 PSI

SSS

American straight thread UNC-UNF 60° conforms to ANSI B 1.1

CODE	A mm (in)	B mm (in)	C mm (in)	D Thread Depth mm (in)		
SA	12,5 (0.49)	38,1 (1.50)	17,5 (0.69)	5/16-18 UNC-2B 14 (0.55)	15 ⁺¹ (133 ÷ 142)	20 ⁺¹ (177 ÷ 186)
SB	19 (0.75)	47,6 (1.87)	22,2 (0.87)	3/8 - 16 UNC-2B 14 (0.55)	20 ⁺¹ (177 ÷ 186)	25 ⁺¹ (266 ÷ 288)
SC	25,4 (1.00)	52,4 (2.06)	26,2 (1.03)	3/8 - 16 UNC-2B 14 (0.55)	20 ⁺¹ (177 ÷ 186)	25 ⁺¹ (266 ÷ 288)

DCAT_006_028_21060740




GAS STRAIGHT THREAD PORTS

BSPP

British standard pipe parallel (55°) conforms to UNI - ISO 228

DCAT_006_026_21064779



CODE	Nominal size	A	Ø B mm (in)	Ø C mm (in)	D mm (in)	E		
GD	1/2"	G 1/2	—	19 (0.75)	17 (0.67)	—	20 ⁺¹ (177 ÷ 186)	50 ^{+2,5} (443 ÷ 465)
GE	3/4"	G 3/4	—	24,5 (0.96)	18 (0.71)	—	30 ^{+2,5} (266 ÷ 288)	90 ⁺⁵ (797 ÷ 841)
GF	1"	G 1	—	30,5 (1.20)	18 (0.71)	—	50 ^{+2,5} (443 ÷ 465)	130 ⁺¹⁰ (1151 ÷ 1239)

04/01/2019

Replaces: 01/06.2009

PORT SIZES

 Tightening torque for low pressure side port.

 Tightening torque for high pressure side port.


For reversible rotation, please consult only the tightening torque for high pressure side port.

SAE STRAIGHT THREAD PORTS J514

ODT

American straight thread UNC-UNF 60° conforms to ANSI B 1.1

DCAT_006_027_21060524

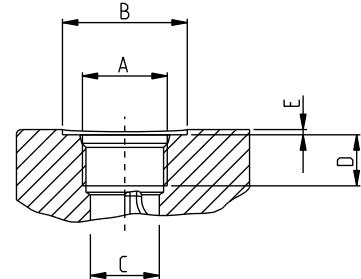


CODE	Nominal size	A	Ø B	Ø C	D	E		
			mm (in)	mm (in)	mm (in)	mm (in)	Nm (lbf in)	Nm (lbf in)
OC	5/8"	7/8" - 14 UNF - 2B	35 (1.38)	20,5 (0.81)	17 (0.67)	0,5 (0.02)	30 ^{+2,5} (266 ÷ 288)	70 ⁺⁵ (620 ÷ 664)
OD	3/4"	1 1/16" - 12 UNF - 2B	42 (1.65)	24,8 (0.98)	20 (0.79)	0,5 (0.02)	40 ^{+2,5} (354 ÷ 376)	120 ⁺¹⁰ (1062 ÷ 1151)
OF	1"	1 5/16" - 12 UNF - 2B	49 (1.93)	30,5 (1.20)	20 (0.79)	0,5 (0.02)	60 ⁺⁵ (531 ÷ 575)	170 ⁺¹⁰ (1505 ÷ 1593)

GERMAN FLANGED PORTS - 4 Bolts

GERMAN

Metric thread ISO 60° conforms to ISO/R 262

DCAT_033_028_17681888



01/06/2009

CODE	A	B	C		
	mm (in)	mm (in)	Thread Depth mm (in)	Nm (lbf in)	Nm (lbf in)
BC	15 (0.60)	35 (1.38)	M 6 12 (0.47)	8 ^{+0,5} (71 ÷ 75)	8 ^{+0,5} (71 ÷ 75)
BE	20 (0.79)	40 (1.57)	M 6, 12 (0.47)	8 ^{+0,5} (71 ÷ 75)	8 ^{+0,5} (71 ÷ 75)

DRAIN PORT SIZES




Tightening torque for low pressure side port.

GAS STRAIGHT THREAD PORTS

BSPP

British standard pipe parallel (55°) conforms to UNI - ISO 228

DCAT_006_026_21064779




CODE	Nominal size	A	Ø B	Ø C	D	E	
			mm (in)	mm (in)	mm (in)	mm (in)	
GB	1/4"	G 1/4	21,5 (0.85)	12 (0.47)	15 (0.59)	1,5 (0.06)	15 ⁺¹ (133 ÷ 142)

METRIC STRAIGHT THREAD PORTS ISO 6149

METRIC

Metric thread ISO 60° conforms to ISO/R 262

DCAT_006_026_21064779




CODE	A	Ø B	Ø C	D	E	
		mm (in)	mm (in)	mm (in)	mm (in)	
TA	M 10x1	22 (0.87)	9 (0.35)	13 (0.51)	0,5 (0.02)	10 ^{+0,5} (89 ÷ 93)

SAE STRAIGHT THREAD PORTS J514

ODT

American straight thread UNC-UNF 60° conforms to ANSI B 1.1

DCAT_006_027_21060524



01/06/2009


CODE	A	Ø B	Ø C	D	E	
		mm (in)	mm (in)	mm (in)	mm (in)	
03	7/16"-20 UNF-2B	21 (0.83)	9,5 (0.37)	14 (0.55)	1 (0.04)	12 ⁺¹ (106 ÷ 115)

VALVE OPTIONS


Replaces: 01/06/2009

PRIORITY VALVE


- P1** Constant delivery and internal recirculation of excess flow.




- P2** Constant delivery at controlled pressure.
Internal recirculation of excess flow and drain valve.




- P3** Constant delivery at controlled pressure.
Excess flow and drain valve must be connected to tank.



- P4** Constant delivery and excess flow can both be used under load.




- P5T** Constant delivery at controlled pressure with drain valve connected to tank.
Excess flow can be used under load.




ELECTRIC VALVE FOR MOTORS

- O UNL** By-pass valve normally closed with max. pressure relief valve and anti-cavitation valve.



- O PRV** Proportional relief valve and anti-cavitation valve..




04/01/2019


- (◆) For more information please consult our built-in valves technical catalogue and our pre-sales department

MAX PRESSURE RELIEF VALVE


- VPEF..** Fixed setting with external drain.




- VPIF..** Fixed setting with internal drain.



- VPER..** Adjustable setting with external drain.




- VPIR..** Adjustable setting with internal drain.




LOAD SENSING VALVE

...




...




...

- Dynamic with relief valve fitted on the main line.




...

- Dynamic with relief valve fitted on controlled line.



CHECK VALVE

- V8** Anti-cavitation valve.



HOW TO ORDER - SINGLE UNITS

1	2	3	4	5	6	7	8	9	10	11	12	13
---	---	---	---	---	---	---	---	---	----	----	----	----

PHP 20•19	L	0	-	82	E2	-	L	-	EB/EA	-	N	-	EL	-	D	*	-	GB	-	FS
------------------	----------	----------	----------	-----------	-----------	----------	----------	----------	--------------	----------	----------	----------	-----------	----------	----------	----------	----------	-----------	----------	-----------

1	Type	Pump type	Motor type
8,26 cm ³ /rev (0.50 in ³ /rev)	○	PHP 20•8	PHM 20•8
10,9 cm ³ /rev (0.66 in ³ /rev)	○	PHP 20•10,5	PHM 20•10,5
11,23 cm ³ /rev (0.68 in ³ /rev)	○	PHP 20•11,2	PHM 20•11,2
14,53 cm ³ /rev (0.88 in ³ /rev)	○	PHP 20•14	PHM 20•14
16,85 cm ³ /rev (1.02 in ³ /rev)	○	PHP 20•16	PHM 20•16
18,29 cm ³ /rev (1.11 in ³ /rev)	○	PHP 20•18	PHM 20•18
19,09 cm ³ /rev (1.16 in ³ /rev)		PHP 20•19	PHM 20•19
21,14 cm ³ /rev (1.29 in ³ /rev)		PHP 20•20	PHM 20•20
23,32 cm ³ /rev (1.42 in ³ /rev)		PHP 20•23	PHM 20•23
24,84 cm ³ /rev (1.52 in ³ /rev)		PHP 20•24,5	PHM 20•24,5
26,42 cm ³ /rev (1.61 in ³ /rev)		PHP 20•25	PHM 20•25
28,21 cm ³ /rev (1.72 in ³ /rev)		PHP 20•27,8	PHM 20•27,8
33,03 cm ³ /rev (2.01 in ³ /rev)		PHP 20•31,5	PHM 20•31,5

2	Rotation	Code
Left		S
Right		D
Reversible rear external drain		R
Reversible side external drain		L
Reversible internal drain		B

3	Outboard bearing options	Code
Without outboard bearing		0
Version		W8
Version		4
Version		5
Version		6
Version		7
Version		8
Version		9

4	Drive shaft	Code
European tapered 1:8		82
German tapered 1:5		54
German tapered 1:5		55
Straight		46
SAE "A" spline (9 teeth)		03
SAE spline (10 teeth)		01
SAE "A" spline (11 teeth)		07
SAE "A" straight		31
Straight		49
Straight		50

Code	Drive shaft	4
04	SAE "B" spline	
32	SAE "B" straight	
12	DIN 54 82 spline	
48	Straight (only for version 6)	
B1	Straight (only for version 8)	
95	Tang	

Code	Mounting flange	5
E2	European	
B2	German	
B4	German 2 bolt	
B5	German 2 bolt	
B6	German 4 bolt	
S9	SAE "A" 2 bolt	
S5	SAE "B" 2 bolt	
W8	German	

Code	Ports position	6
L	IN/OUT side	
H	IN side / OUT rear	O
K	IN rear / OUT side	O
P	Rear	

Code	Ports IN/OUT	7
GERMAN FLANGED PORTS		
Side	Rear	Type O
BE/BC	PHP 20	8-10,5-11,2,14-16-18-
BC/BE	PHP 20	19-20-23-24,5 25-27,8-31,5
EUROPEAN FLANGED PORTS		
Side	Rear	Type O
EA/EA	PHP 20	8-10,5-11,2
EA/EA	PHP 20	
EB/EA	PHP 20	14-16-18-19-20
EA/EB	PHP 20	23-24,5-25-27,8-31,5
SAE FLANGED PORTS (SSM)		
Side	Rear	Type O
MA/MA	PHP 20	8-10,5-11,2
MA/MA	PHP 20	
MB/MA	PHP 20	14-16-18-19-20
MA/MB	PHP 20	
MC/MB	PHP 20	23-24,5-25-27,8-31,5
MB/MC	PHP 20	

Replaces: 01/06/2009

04/01/2019

HOW TO ORDER - SINGLE UNITS

Replaces: 01/06/2009

04/01/2019

7 Ports IN/OUT			Code
SAE FLANGED PORTS (SSS)			
Type	O	Side	Rear
8-10,5-11,2	PHP 20	SA/SA	
	PHM 20	SA/SA	
14-16-18-19-20	PHP 20	SB/SA	
	PHM 20	SA/SB	
23-24,5-25-27,8-31,5	PHP 20	SC/SB	
	PHM 20	SB/SC	
GAS STRAIGHT THREAD PORTS (BSPP)			
Type	O	Side	Rear
8-10,5-11,2	PHP 20	GD/GD	GD/GD
	PHM 20	GD/GD	GD/GD
14-16-18-19-20	PHP 20	GE/GD	GE/GD
	PHM 20	GD/GE	GD/GE
23-24,5-25-27,8-31,5	PHP 20	GF/GD	GE/GD
	PHM 20	GD/GF	GD/GF
SAE STRAIGHT THREAD PORTS (ODT)			
Type	O	Side	Rear
8-10,5-11,2	PHP 20	OC/OC	OC/OC
	PHM 20	OC/OC	OC/OC
14-16-18-19-20	PHP 20	OD/OC	OD/OC
	PHM 20	OC/OD	OC/OD
23-24,5-25-27,8-31,5	PHP 20	OF/OC	OD/OC
	PHM 20	OC/OF	OC/OD
8 Seals (a)		Code	
Buna (standard)		N	
Viton		V	

9 Mounting flange and rear cover options (b)			Code
Cast iron mounting flange and rear cover (standard - no code)			
Aluminium mounting flange and cast iron rear cover		E	
Cast iron mounting flange and aluminium rear cover		L	
Aluminium mounting flange and rear cover		EL	
10 Shaft seal options		Code	
Standard shaft seal with wiper seal		D	
High pressure special shaft seal		H	
High pressure special shaft seal with wiper seal		C	

11 Drain port position - Rev. rotation L			Code
Side drain with side port position			L
Side drain with bottom port position			*

Code	Drain port	12
IN/OUT GERMAN FLANGED PORTS		
Side	Rear	Type O
TA		PHP 20 8-10,5-11,2,14-16-18- PHM 20 19-20-23-24,5 25-27,8-31,5
IN/OUT GERMAN FLANGED PORTS		
Side	Rear	Type O
GB		PHP 20 8-10,5-11,2,14-16-18- PHM 20 19-20-23-24,5 25-27,8-31,5
IN/OUT SAE FLANGED PORTS (SSM)		
Side	Rear	Type O
GB		PHP 20 8-10,5-11,2,14-16-18- PHM 20 19-20-23-24,5 25-27,8-31,5
IN/OUT SAE FLANGED PORTS (SSS)		
Side	Rear	Type O
03		PHP 20 8-10,5-11,2,14-16-18- PHM 20 19-20-23-24,5 25-27,8-31,5
IN/OUT GAS STRAIGHT THREAD PORTS (BSPP)		
Side	Rear	Type O
GB	GB	PHP 20 8-10,5-11,2,14-16-18- PHM 20 19-20-23-24,5 25-27,8-31,5
IN/OUT SAE STRAIGHT THREAD PORTS (ODT)		
Side	Rear	Type O
03	03	PHP 20 8-10,5-11,2,14-16-18- PHM 20 19-20-23-24,5 25-27,8-31,5
Code	Shaft arrangement	13
FS	Female spline	

- (a) Choose the seals according to the temperature shown on page 5
- (b) Mounting flange material on page 34 ÷ 37
Rear cover material on page 18 ÷ 19

HOW TO ORDER - POLARIS PHP 20 DOUBLE PUMPS

1 2 3 4 5 6 7 8 9 10 11 12

PHP 20•19 - 82 E2 - L EB/EA /

Front section

20•19 - L **/EA - S7 - S / FS - L - N - C

Rear section

1	Type	Pump type
8,26 cm ³ /rev (0.50 in ³ /rev)	●	PHP 20•8
10,9 cm ³ /rev (0.66 in ³ /rev)	●	PHP 20•10,5
11,23 cm ³ /rev (0.68 in ³ /rev)	●	PHP 20•11,2
14,53 cm ³ /rev (0.88 in ³ /rev)	●	PHP 20•14
16,85 cm ³ /rev (1.02 in ³ /rev)	●	PHP 20•16
18,29 cm ³ /rev (1.11 in ³ /rev)	●	PHP 20•18
19,09 cm ³ /rev (1.16 in ³ /rev)		PHP 20•19
21,14 cm ³ /rev (1.29 in ³ /rev)		PHP 20•20
23,32 cm ³ /rev (1.42 in ³ /rev)		PHP 20•23
24,84 cm ³ /rev (1.52 in ³ /rev)		PHP 20•24,5
26,42 cm ³ /rev (1.61 in ³ /rev)		PHP 20•25
28,21 cm ³ /rev (1.72 in ³ /rev)		PHP 20•27,8
33,03 cm ³ /rev (2.01 in ³ /rev)		PHP 20•31,5

2	Drive shaft	Code
European tapered 1:8		82
German tapered 1:5		54
German tapered 1:5		55
Straight		46
SAE "A" spline (9 teeth)		03
SAE spline (10 teeth)		01
SAE "A" spline (11 teeth)		07
SAE "A" straight		31
Straight		49
Straight		50
SAE "B" spline		04
SAE "B" straight		32
DIN 54 82 spline		12
Straight (only for version 6)		48
Straight (only for version 8)		B1
Tang		95

3	Mounting flange	Code
European		E2
German		B2
German 2 bolt		B4
German 2 bolt		B5

Code Mounting flange 3

B6	German 4 bolt
S9	SAE "A" 2 bolt
S5	SAE "B" 2 bolt
W8	German

Code Ports position 4

L	Side
---	------

Code Ports IN/OUT 5

GERMAN FLANGED PORTS		
Side	Type	Code
Side	Type	●
BE/BC	PHP 20	8-10,5-11,2-14-16-18-19 20-23-24,5-25-27,8-31,5

Code EUROPEAN FLANGED PORTS

Side	Type	Code
EA/EA	PHP 20	8-10,5-11,2
EB/EA	PHP 20	14-16-18-19-20-23-24,5 25-27,8-31,5

Code SAE FLANGED PORTS (SSM)

Side	Type	Code
MA/MA	PHP 20	8-10,5-11,2
MB/MA	PHP 20	14-16-18-19-20
MC/MB	PHP 20	23-24,5-25-27,8-31,5

Code SAE FLANGED PORTS (SSS)

Side	Type	Code
SA/SA	PHP 20	8-10,5-11,2
SB/SA	PHP 20	14-16-18-19-20
SC/SB	PHP 20	23-24,5-25-27,8-31,5

Code GAS STRAIGHT THREAD PORTS (BSPP)

Side	Type	Code
GD/GD	PHP 20	8-10,5-11,2
GE/GD	PHP 20	14-16-18-19-20

GF/GD PHP 20 23-24,5-25-27,8-31,5

Code SAE STRAIGHT THEREAD PORTS (ODT)

Side	Type	Code
OC/OC	PHP 20	8-10,5-11,2
OD/OC	PHP 20	14-16-18-19-20

OF/OC PHP 20 23-24,5-25-27,8-31,5

Replaces: 01/06/2009

04/01/2019

HOW TO ORDER - POLARIS PHP 20 DOUBLE PUMPS

Replaces: 01/06/2009

04/01/2019

6	Combination type	Code
Standard		S6
Common inlet		S7
Separate stages		Z6

7	Rotation	Code
Left		S
Right		D

8	Outboard bearing options	Code
Without outboard bearing (standard) no code		...
Version		W8
Version		4
Version		5
Version		6
Version		7
Version		8
Version		9

Code	O	Shaft arrangement	9
FS		Female spline	
Code	Mounting flange and rear cover options (a)		10
	Cast iron mounting flange and rear cover (standard) - no code		
L	Cast iron mounting flange and aluminium rear cover		
Code	Seals (b)		11
N	Buna (standard)		
V	Viton		
Code	Shaft seal options		12
D	Standard shaft seal with wiper seal		
H	High pressure special shaft seal		
C	High pressure special shaft seal with wiper seal		

- (a) Mounting flange material on page 34 ÷ 37
Rear cover material on page 24
- (b) Choose the seals according to the temperature shown on page 5

HOW TO ORDER - POLARIS PHP 20 DOUBLE PUMPS DIFFERENT GROUPS

PHP 20/PLP 20

1	2	3	4	5	6	7	8	9	10	11	12
PHP 20•19	-	82	E2	-	L	EB/EA	/				
Front section											
PLP 20•4	-		L	EA/EA	-	S	0	/	FS	-	L
Rear section											

PHP 20/PLP 10

1	2	3	4	5	6	7	8	9	10	11	12
PHP 20•19	-	82	E2	-	L	EB/EA	/				
Front section											
PLP 10•1	-		L	BB/BA	-	S	0	/	FS	-	L
Rear section											

1	Type (a)	Code	Code	Outboard bearing options	8
	The same of double pumps PHP 20/20	PHP...	...	The same of double pumps	
2	Drive shaft	Code	Code	Shaft arrangement	9
	The same of double pumps PHP 20/20	...	FS	Female spline	
3	Mounting flange	Code	Code	Mounting flange and rear cover options (b)	10
	The same of double pumps PHP 20/20	...		Cast iron mounting flange and rear cover (standard) - no code	
4	Ports position	Code	E	Aluminium mounting flange and cast iron rear cover	
Side	L		L	Cast iron mounting flange and aluminium rear cover	
5	Ports IN/OUT	Code	EL	Aluminium mounting flange and rear cover	
	The same of double pumps PHP 20/20	...			
6	Combination type	Code	Code	Seals	11
PHP 20/PLP 20 Standard - No code	S6	...	The same of double pumps PHP 20/20		
PHP 20/PLP 20 Common inlet	S7	Code	O	Shaft seal options	12
PHP 20/PLP 20 Separate stages	Z6	...	The same of double pumps PHP 20/20		
PHP 20/PLP 10 Standard - No code	T6				
PHP 20/PLP 10 Common inlet	T7				
PHP 20/PLP 10 Separate stages	Z6				
7	Rotation	Code			
	The same of double pumps PHP 20/20	...			

Replaces: 01/06/2009

04/01/2019

- (a) For PLP 20 and PLP 10 features please consult the proper technical catalogue
- (b) Mounting flange material on page 34 ÷ 37
Rear cover material on page 24 ÷ 25

NOTES

NOTES

Our policy is one of continuous improvement in product. Specification of items may, therefore, be changed without notice.

PH 04 TA

Edition: 04/01.2019

Replaces: PH 03 TA



Headquarters:

CASAPPA S.p.A.
Via Balestrieri, 1
43044 Lemignano di Collecchio
Parma (Italy)
Tel. (+39) 0521 30 41 11
Fax (+39) 0521 80 46 00
IP Videoconferencing
E-mail: info@casappa.com
www.casappa.com

